



**STINGER®**

*The standard flashlight in law enforcement the world over.*



Class I, Div. 2, Grps A,B,C,D T1;  
Class II, Div. 2, Grp F,G T3



Class I, Div. 2, Grps A,B,C,D T1;  
Class II, Div. 2, Grp F,G T3



Meets applicable European  
Community Directives

- Xenon gas-filled bi-pin bulb; spare bulb in tailcap
- Adjustable focus beam
- Up to 15,000 peak beam candlepower; 125 lumens
- 3-cell 3.6V nickel-cadmium sub-C battery
- Up to 1 hour continuous use
- 7.38"
- 10 oz.
- Fast Charger available
- Available in black

These compact, super-bright, rechargeable, lightweight personal lights are the most powerful lights ever made in their size. The machined aluminum housing that's anodized against corrosion and the unbreakable polycarbonate lens make the Stingers virtually indestructible.



# STINGER<sup>®</sup> SERIES



A. The only machined aluminum flashlights to earn UL listing for Class I, II, Div. 2

B. Serialized for positive identification

C. Xenon gas-filled bi-pin bulb with variable spot to flood beam and 30-hour life

D. LED charge-continuity indicator; compact, snap-in charger mounts in any position

E. Nickel-cadmium battery recharges up to 1,000 times

COMMON  
FEATURES



## STINGER XT<sup>®</sup>

Compact, powerful, rechargeable flashlight with easy-to-locate tactical tailcap switch.

- Xenon gas-filled bi-pin bulb with 30-hour life
- Adjustable focus beam
- Push-button tailcap switch for one-hand momentary or constant operation
- Up to 15,000 peak beam candlepower; 125 lumens
- 3-cell 3.6V nickel-cadmium sub-C battery
- Up to 1 hour continuous use
- 7.7"
- 11.1 oz.
- Available in black

CE Meets applicable European Community Directives



## STINGER HP<sup>™</sup>

Lightweight, high-performance rechargeable flashlight that delivers up to 40,000 candlepower.

- Xenon gas-filled bi-pin bulb with 30-hour life
- Adjustable focus beam
- Up to 40,000 peak beam candlepower; 120 lumens
- 3-cell 3.6V nickel-cadmium sub-C battery
- Up to 1 hour continuous use
- 8.25"
- 12.2 oz.
- Available in black

UL LISTED Class I, Div. 2, Grps A, B, C, D T1; Class II, Div. 2, Grp F, G T3

UL LISTED Class I, Div. 2, Grps A, B, C, D T1; Class II, Div. 2, Grp F, G T3

CE Meets applicable European Community Directives



## STINGER XT HP<sup>™</sup>

High-performance, compact, rechargeable flashlight with easy-to-locate tactical tailcap switch; delivers up to 40,000 candlepower.

- Xenon gas-filled bi-pin bulb with 30-hour life
- Adjustable focus beam
- Push-button tailcap switch for one-hand momentary or constant operation
- Up to 40,000 peak beam candlepower; 120 lumens
- 3-cell 3.6V nickel-cadmium sub-C battery
- Up to 1 hour continuous use
- 8.63"
- 14.6 oz.
- Available in black

CE Meets applicable European Community Directives



**POLYSTINGER®**

*Lightweight, powerful, rechargeable flashlight with super-tough, non-conductive nylon polymer construction that makes it virtually indestructible.*

- Xenon gas-filled bi-pin bulb with 30-hour life; spare bulb in tailcap
- Adjustable focus beam
- Up to 15,000 peak beam candlepower; 125 lumens
- 3-cell 3.6V nickel-cadmium sub-C battery
- Up to 1 hour continuous use
- 7.4"
- 8.7 oz.
- Available in black, yellow or olive drab

UL LISTED Class I, Div. 2, Grps A,B,C,D T1; Class II, Div. 2, Grp G T3

CE Meets applicable European Community Directives

**ULTRASTINGER®**

*The brightest Streamlight flashlight available, providing up to 75,000 candlepower.*

- 30-hour life xenon-halogen gas-filled bi-pin bulb
- Adjustable focus beam
- Up to 75,000 peak beam candlepower; 295 lumens
- 5-cell 6V nickel-cadmium sub-C battery
- Up to 1 hour continuous use
- Push-button head switch
- 11.75"
- 1.1 lbs.
- Available in black

CE Meets applicable European Community Directives



# STINGER<sup>®</sup> SERIES



## STINGER ACCESSORIES:

5 Unit Bank Charger, 120V or 230V AC



5 Unit Bank "Smart" Fast Charger, 120V or 230V AC



12V DC Charge Cords

100V, 120V, 230V, 240V AC Charge Cords



Colored Lenses


Infrared Lens



Holsters

Ring Holder

Ultrastinger 10-hour Charger

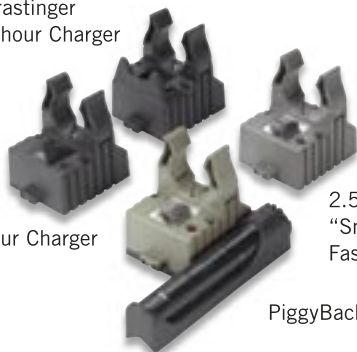

10-hour Charger

2.5-hour "Smart" Fast Charger

PiggyBack Charger

**PIGGYBACK<sup>®</sup> CHARGER** - Double your battery power! Now you can charge your Stinger flashlight while simultaneously charging its spare battery. The Stinger PiggyBack Charger works with Stinger, Stinger HP, Stinger XT, Stinger XT HP, as well as PolyStinger. Available in steady charge or fast charge.



Safety Wands

Accessories Not Shown:  
Bulbs



Battery Sticks



**Ultra-Head Upgrade Kit**  
Convert your Stinger and Stinger XT flashlights into HP — High Performance Stingers. Increases their candlepower from 15,000 to 40,000.



**SL-20X®**

**Full-size, professional grade, high intensity, rechargeable flashlight.**

CE Meets applicable European Community Directives


- 10 watt, 6V quartz-halogen lamp with tungsten filament
- Up to 30,000 pre-focused peak beam candlepower; 200 lumens
- Constant-on and momentary modes
- Machined aircraft aluminum with anodized finish
- Up to 1.5 hours continuous use
- 6V, 2.4 amp-hour, 1/2 D nickel cadmium rechargeable battery
- 13"
- 1.9 lbs.
- Available in black



This versatile family of rechargeable personal lights has the power and the durability you need for almost any job. Choose from a variety of features, including Streamlight's patented dual incandescent/LED; and no matter which SL light you choose, you get these great features:



# SL SERIES

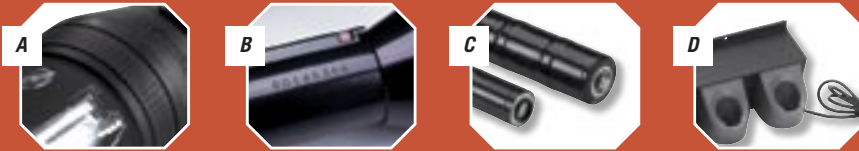

- A. Unbreakable polycarbonate lens with scratch-resistant coating
- B. Individual serialization for easy identification
- C. Nickel-cadmium rechargeable battery
- D. Rechargeable up to 1,000 times on 100V, 120V, 230V, 240V AC, or 12V DC chargers

COMMON FEATURES



### SL-20XP™ LED

Full-size yet lightweight incandescent/LED rechargeable that combines the brightness of an incandescent with the extended run time of LEDs – the best of both worlds.

- 8 watt, 6V halogen bulb with a 100-hour lifetime
- Pre-focused halogen beam of up to 28,000 candlepower
- 3 white LEDs with 100,000-hour lifetime provide up to 13 lumens; bulb rating is 150 lumens
- Lightweight, super-tough nylon polymer case with non-slip rubber comfort grip
- Run time is 1.5 hours for halogen only; 40 hrs. for LEDs only; emergency backup LED (after full halogen run) = 1 hr. minimum
- Dual switches to select halogen or LEDs
- Constant-on and momentary modes
- High-capacity sub-C, nickel-cadmium rechargeable battery
- 13.2"
- 1.1 lbs.
- Available in black, yellow or orange

### SL ACCESSORIES:



Safety Wands



Battery Sticks



5 Unit Bank Charger, 120V or 230V AC



12V DC Charge Cords

100V, 120V, 230V & 240V Charge Cords



Lamp Module



Ring Holder

Deluxe Nylon Holster



Charge Sleeve



***“I FEEL SO MUCH SAFER AND MORE CONFIDENT GOING THROUGH THICK SMOKE WITH MY STREAMLIGHT.”***

Bob LaGrow, Firefighter, FDNY  
NY State Certified Fire Instructor



Bob LaGrow has been involved in the fire service for 15 years. When not working out of Engine Co. 63 in the Bronx, he's a volunteer firefighter in his hometown of West Haverstraw, NY, holding the rank of lieutenant. Bob also passes on his skills to other firefighters as a trainer with the Rockland County Fire Training Center.

“The Streamlight Survivor and Fire Vulcan are both essential tools,” Bob says. “I hope I never have to go into a burning or smoke-filled building without a Survivor and a Fire Vulcan. The LED taillights on the Fire Vulcan are true life-savers. There’s no question that you’re safer when you can not only see, but be seen by other firefighters; and it’s a comforting feeling to know you can signal for help so easily if the need arises.

“I’ve used lights by Streamlight my entire career. They’re dependable & durable, with features that firefighters really need. I never hesitate to recommend Streamlight. Although most experienced firefighters don’t need to be told how good these lights are.”



The introduction of the Vulcan® several years ago represented a major breakthrough. It was the first truly safety approved compact, lightweight, waterproof lantern that was big on power. And talk about tough! It's almost impossible to destroy a Vulcan®. Buildings collapse on them, trucks drive over them, fires scorch them, and they keep shining. Their compact size and durable waterproof construction, combined with a powerful beam and rechargeability, make the Vulcan® series ideal for the most demanding jobs.



# VULCAN® SERIES



- A. Powerful, ultra-bright halogen bulb
- B. Zero-maintenance, lead acid battery
- C. Recharging Rack
- D. Unbreakable polycarbonate lens with scratch-resistant coating

COMMON FEATURES



-  Factory Mutual (FM) approved for Class I, II, III, Division 2
-  Canadian Standards Association (CSA) certified for Class I, II, Division 2; Class III
-  NFPA Rack meets requirements of NFPA 1901-12-1.7 mounted in any position
-  Meets applicable European Community Directives
-  FTZU 04 ATEX 0180 II 3G EEx n AL IIC T2 II 3D T62°C

## VULCAN®

*Industrial-duty, lightweight, rechargeable, waterproof lantern; it's virtually indestructible.*

- High-intensity halogen bi-pin bulb: 8 watt spot; xenon dual filament 8 watt safety bulb delivers instant backup beam
- 8 watt spot provides up to 80,000 peak beam candlepower (bulb lumens: 150 typical); dual filament 8 watt spot has up to 70,000 peak beam candlepower each (bulb lumens: 157 typical)
- Up to 3.25 hrs. continuous run time per charge
- Zero-maintenance 4.5 amp-hour sealed lead acid battery is rechargeable up to 500 times
- Red and green LEDs give charge status
- Serialized for positive identification
- High-impact ABS thermoplastic housing with rubberized cushioned grip handle
- 7 1/2" (L) x 5" (W) x 6.5" (H)
- 3.3 lbs.
- Available in high-visibility yellow or international safety orange

## VULCAN ACCESSORIES:

### THREE VULCAN MODELS:

**Standard System** – Includes AC and DC chargers and charging rack.

**Vehicle Mount System** – Comes with vehicle-mountable hard-wire rack.

**Dual Filament System** – Features a 3-position toggle switch for easy use with gloves. Includes an 8 watt spot for an instant backup, plus AC and DC chargers and charging rack.



Accessories not shown: Dual Filament bulb for instant backup available on Standard and Vehicle Mount system (included with Dual Filament System)





**FIRE VULCAN ACCESSORIES:**



Charging Rack



Quick Release Strap



Battery



12V DC Charge Cords



100V, 120V, 230V, 240V AC Charge Cords

In a smoke-filled room, it's not only important that you can see – it's critical that you can be seen. In addition to the high-intensity halogen lamp, the rechargeable Fire Vulcan® has two powerful, ultra-bright LED taillights. Your partners can follow you through the thickest smoke; and they can find you fast in an emergency. The toggle switch makes it easy to go between strobe and steady modes, so you can use it to increase visibility at a fire or accident scene or signal for help.



# FIRE VULCAN® SERIES



**A. 3-Position Toggle Switch** designed for easy use with gloves

**B. High-impact ABS thermoplastic waterproof housing**

**C. Quick-release strap**

**D. Two powerful, ultra-bright blue LED taillights**

COMMON FEATURES



## FIRE VULCAN®

*A life-saving innovation. The only lantern with taillight LEDs to help you be seen even in thick smoke.*



Factory Mutual (FM) approved for Class I, II, III, Division 2



Canadian Standards Association (CSA) certified for Class I, II, Division 2; Class III



Rack meets requirements of NFPA 1901-12-1.7 mounted in any position



Meets applicable European Community Directives



FTZU 04 ATEX 0180  
II 3G EEx n AL IIC T2  
II 3D T62°C

- High-intensity halogen bi-pin 8 watt spot bi-pin bulb and two ultra-bright blue LEDs
- Strobe and Steady Modes
- Up to 80,000 peak beam candlepower with halogen bulb
- Bulb Rating: 150 lumens typical
- Run times are up to 3 hrs. with steady halogen & LEDs; up to 6 hrs. with blinking halogen and LEDs; up to 60 hours with blinking LEDs only
- 6V 4.5 amp-hour rechargeable battery can be recharged up to 500 times
- 7 1/2" (L) x 5" (W) x 5 3/4" (H)
- 3.3 lbs.
- Quick-release strap
- Serialized for positive identification
- Available in high-visibility orange

## TWO FIRE VULCAN MODELS:

**Standard System** – Includes charging rack and both AC and DC chargers

**Vehicle Mount System** – Includes 12V DC vehicle-mountable direct-wire charging rack





**LITEBOX®**

*Portable, powerful, industrial-duty, rechargeable lantern with swiveling neck is ideal for firefighters, industry and homeowners.*

- High-intensity halogen bi-pin bulb available in 8 watt and 20 watt spot and flood. Xenon dual filament 8 watt safety bulb features instant backup beam

| Candlepower:    | Peak Beam Cp | Bulb Lumens (typical) |
|-----------------|--------------|-----------------------|
|                 | Bi-pin bulb  |                       |
| 8 watt flood =  | 1,500        | 150                   |
| 20 watt flood = | 3,000        | 400                   |
| 8 watt spot =   | 80,000       | 150                   |
| 20 watt spot =  | 105,000      | 400                   |
| Dual Filament – |              |                       |
| 8 watt spot =   | 70,000 each  | 157                   |

- High-impact ABS thermoplastic housing with rubberized impact bumper, lens ring, and cushioned-grip handle
- Up to 9 hrs. continuous run time per charge
- 11.5" (L) x 5.1" (W) x 7" (H)
- 7.4 lbs.



**FOUR LITEBOX MODELS:**

**Standard System**

Includes shoulder strap, AC and DC chargers and mounting rack. Available in international safety orange or high-visibility yellow.

**Vehicle Mount System**

Comes with vehicle-mountable hard-wire charge rack and shoulder strap. Available in international safety orange or high-visibility yellow.

**Power Failure System**

Features AC and DC chargers and "smart" power failure circuitry that automatically goes on when power goes off. Available in international safety orange or beige.

**Dual Filament System**

Includes an 8 watt safety spot for instant backup, AC and DC chargers, charge rack and shoulder strap. Available in international safety orange or high-visibility yellow.




**CE** Meets applicable European Community Directives.

**NFPA** Rack meets requirements of NFPA 1901-10-1.7 mounted in any position.

The rugged, dependable LiteBox® was the first lantern with a swivel neck for full right angle lighting. It runs up to 9 hours and is now brighter than ever with an innovative new bulb configuration. The high-intensity halogen bi-pin bulb, available in spot or flood, provides a beam of up to 105,000 peak beam candlepower. An optional xenon Dual Filament system is available, providing the security of a backup safety beam.



# LITEBOX® SERIES




- A. Unbreakable polycarbonate lens
- B. Individual serialization for easy identification
- C. 6 volt, 12 amp-hour lead acid rechargeable battery
- D. Rechargeable up to 500 times on 120V, 230V or 240V AC, or 12V DC chargers

COMMON FEATURES



## LITEBOX ACCESSORIES:

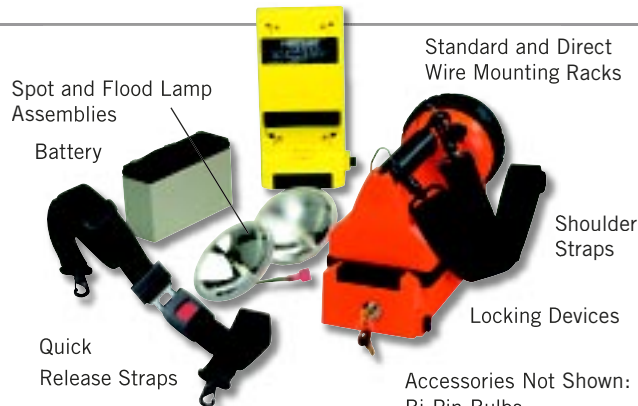





A lightweight, handheld personal light with right angle head designed to clip on to turn-out gear for easy, hands-free use. Available with Streamlight's exclusive Smoke Cutter optics that penetrate smoke, fog and mist for improved visibility.



# SURVIVOR®

# SERIES

COMMON  
FEATURES



**A.** Unbreakable Lexan® lens with silicone anti-scratch coating

**B.** Raised switch for easy operation with gloves

**C.** Nickel-cadmium rechargeable battery

**D.** Rechargeable up to 1,000 times on 110V, 120V, 230V, 240V or 12V DC chargers



## SURVIVOR®

**Tough, durable, portable lantern with rotating head; certified for hazardous locations.**

- Lamp and battery housings and battery base made of high-impact, super-tough nylon for exceptional durability
- All openings are O-ring sealed for weather resistance
- Industrial rechargeable nickel-cadmium 4.8V, 1.8 amp-hour, 4-cell sub-C battery pack
- 6.75" (H) x 2.85" (W) x 2.87" (D) – Height in charger: 8.5"
- 15.4 oz. without charger
- Serialized for easy identification
- Available in international safety orange or high visibility yellow



### Survivor Division 1

- Features a 2.1 watt xenon bulb with up to 15,000 peak beam candlepower (31 lumens)
- Runs up to 4.25 continuous hours between charges



### Survivor Division 1

UL listed for Class I, Division 1, Group C, D



Meets applicable European Community Directives



Meets requirements of NFPA



Zone 1 FTZU 05 ATEX II 2GD EEx ib IIC (pending)



### Survivor Division 2

UL listed for Class I, II, III, Division 2, Groups A, B, C, D, F, G.



CUL listed for Class I, II, III, Division 2, Groups A, B, C, D, F, G.



Meets applicable European Community Directives



Meets requirements of NFPA



Zone 2 FTZU 04 ATEX 0179 II 3G EEx nI IIC T3 II 3D T80°C

### Survivor Division 2

- Features a 5.5 watt, black-dot xenon bulb with anti-glare coating for maximum visibility in smoke & fog. Up to 25,000 peak beam candlepower (114 lumens).
- Runs up to 1.70 continuous hours between charges. Optional spare battery can be speed-loaded in seconds.

## SURVIVOR ACCESSORIES:

5 Unit bank Charger, 120V or 230V AC



10-hour Steady Charger Holder

Rechargeable Battery Packs



Replacement Bulbs



12V DC Charge Cords



100V, 120V, 230V, 240V AC Charge Cords

Piggyback® Charger for charging light and spare battery pack simultaneously.

(Available in Fast or Steady Charge for Division 2 models only)





NON-RECHARGEABLES



These lightweight, affordable, alkaline battery-powered personal lights are extremely durable, long-lasting, and powerful. Available in 2AA, 4AA, 3C and 3N configurations.



# PROPOLYMER<sup>®</sup> SERIES



**A. Virtually indestructible, non-conductive polymer with a scratch-resistant face-cap for impact & shock-resistance**

**B. Unbreakable polycarbonate lens**

**C. Convenient tailcap on/off/blink switch (2AA has dual head & tailswitches)**

COMMON FEATURES



## 4AA PROPOLYMER<sup>®</sup>

**Tough, waterproof, super-bright alkaline battery-powered flashlight with one high-intensity xenon bulb that provides 11,000 peak beam candlepower**

- Powered by 4 "AA" alkaline batteries
- Features a 4.8 volt xenon gas-filled module
- Up to 11,000 peak beam candlepower with xenon module (34 lumens)
- Runs up to 4 continuous hrs.
- 6.5"
- 6.3 oz.
- Features a wrist lanyard connection
- Available in yellow only



Class I, Div. 1, Groups C, D;  
Class I, Div. 2, Groups A, B, C, D;  
Class II, Div. 2, Group F&G;  
Class III, T3C



Class I, Div. 2, Groups A, B, C, D;  
Class II, Div. 2, Group F&G;  
Class III, T3C



Meets applicable European Community Directives



Permissible for use in Gassy Mines,  
Methane/air only. Appr. No. 10C-658-0



SNCH 04 ATEX 3639  
II 2G EEx ib e T4  
II 2D T74°C



## 4AA PROPOLYMER<sup>®</sup> LED

**Impact and shock resistant LED flashlight that provides 155 hours of run time.**

- Powered by 4 "AA" alkaline batteries
- 7 ultra-bright 100,000-hour life LEDs
- 27 lumens typical with 7 white LEDs
- Runs up to 155 hrs.
- 6.5"
- 6.3 oz.
- Features a wrist lanyard connection
- Available in yellow and black



Class I, Div. 1, Groups C, D;  
Class I, Div. 2, Groups A, B, C, D;  
Class II, Div. 2, Group G;  
Class III, T3C



Class I, Div. 2, Groups A, B, C, D;  
Class II, Div. 2, Group G;  
Class III, T3C



Meets applicable European Community Directives



Permissible for use in Gassy Mines,  
Methane/air only. Appr. No. 10C-658-0



SNCH 04 ATEX 3639  
II 2G EEx ib e T4  
II 2D T74°C



## 4AA PROPOLYMER<sup>®</sup> LUXEON<sup>®</sup>

**1 watt, 10,000 hour, super high-flux LED provides a longer reaching, brighter beam that's 10 times brighter than a high-intensity LED. Ergonomically shaped for maximum hand comfort.**

- Powered by 4 "AA" alkaline batteries
- Up to 3,500 peak beam candlepower (40 lumens)
- Waterproof
- Runs up 4 hrs. at full intensity with 2 additional hrs. of declining usable light
- 7"
- 7.52 oz.
- Features a wrist lanyard connection
- Available in yellow and black



Meets applicable European Community Directives





### 3C PROPOLYMER®

*A powerful and incredibly handy flashlight that features a momentary blink or constant on tailcap switch.*

- Powered by 3 "C" alkaline batteries
- 3.7 volt, 785 mA xenon gas-filled module
- Up to 16,000 peak beam candlepower (50 lumens)
- Runs up to 5.5 continuous hrs.
- 8.55"
- 13.5 oz.
- Waterproof
- Features a wrist lanyard connection and a spring-loaded clip
- Available in yellow



Class I, Div. 1, Group D;  
Class I, Div 2, Groups A, B, C, D;  
Class II, Div. 2, Group F&G;  
Class III, T3A



Class I, Div. 2, Groups A, B, C, D;  
Class II, Div. 2, Group F&G;  
Class III, T3A



Meets applicable European Community Directives



Permissible for use in Gassy Mines, Methane/air only. Appr. No. 10C-658-0



SNCH 04 ATEX 3640X  
II 2G EEx ib e T4  
II 2D T70°C

### 3C PROPOLYMER® LED

*Impact and shock resistant LED flashlight that provides 336 hours of run time.*

- Powered by 3 "C" alkaline batteries
- 10 ultra-bright 100,000-hour life LEDs
- 43 lumens typical with 10 white LEDs
- Runs up to 336 hrs.
- 8.55"
- 13.5 oz.
- Waterproof
- Features a wrist lanyard connection and a spring-loaded clip
- Available in yellow or black



Class I, Div. 1, Group D;  
Class I, Div 2, Groups A, B, C, D;  
Class II, Div. 2, Group F&G;  
Class III, T3A



Class I, Div. 2, Groups A, B, C, D;  
Class II, Div. 2, Group F&G;  
Class III, T3A



Meets applicable European Community Directives



Permissible for use in Gassy Mines, Methane/air only. Appr. No. 10C-658-0



SNCH 04 ATEX 3640X  
II 2G EEx ib e T4  
II 2D T70°C

### 3C PROPOLYMER® LUXEON®

*High-performance, 10,000 hour, super high-flux LED provides a longer reaching, brighter beam that's 10 times brighter than a high-intensity LED. Durable, impact resistant and non-conductive.*

- Powered by 3 "C" alkaline batteries
- Up to 3,500 peak beam candlepower (40 lumens)
- Waterproof
- Runs up 5.5 hrs. at full intensity with 2 additional hrs. of declining usable light
- 9.30"
- .94 lbs.
- Rubber boot, tail-end push button switch
- Features a wrist lanyard connection and a spring-loaded clip
- Available in yellow or black



Meets applicable European Community Directives

# PROPOLYMER<sup>®</sup> SERIES



CE Meets applicable European Community Directives

## 3C-XP<sup>®</sup>

*This lightweight alkaline-powered light lets you choose between the high-intensity of an incandescent and the long running time of LEDs. After xenon light expires, LEDs provide a full hour of light.*

- Powered by 3 "C" cell alkaline batteries
- 3 watt xenon bulb with 30-hour life; and three 100,000-hour life high-intensity LEDs
- Up to 16,000 peak beam candlepower (50 lumens) from xenon bulb; 3 white LEDs deliver 13 lumens typical
- Runs up to 5.5 continuous hours on xenon only; over 300 hrs. on LEDs only; the emergency backup LED (after full xenon run) runs for 1 hr.
- Lightweight, super-tough nylon polymer case with non-slip rubber comfort grip
- Dual switch for xenon or LEDs
- Momentary and constant on for xenon; constant on for LEDs
- 10.9"
- .92 lbs.
- Available in black, yellow or orange



## 2AA PROPOLYMER<sup>®</sup>

*Tough, super-convenient, extra-bright flashlight features dual switching on the head and the tail-cap. It's co-molded grip ensures it'll stay in your hand.*

- Powered by 2 "AA" alkaline batteries
- Xenon gas-filled bi-pin bulb, many times brighter than conventional flashlights
- Up to 4,500 peak beam candlepower (9 lumens)
- Runs up to 4 continuous hrs.
- Waterproof
- Features a wrist lanyard connection and pocket clip
- 6.06"
- 3.7 oz.
- Available in yellow



Class I, Div. 1, Groups C, D;  
Class I, Div 2, Groups A, B, C, D;  
Class II, Div. 2, Group G;  
Class III, T3C



Class I, Div. 2, Groups A, B, C, D;  
Class II, Div. 2, Group G;  
Class III, T3C



Meets applicable European Community Directives



Permissible for use in Gassy Mines, Methane/air only. Appr. No. 10C-648-0



II 2G EEx ia IIB T4 SEE 00 ATEX 2990



## 3N PROPOLYMER<sup>®</sup>

*Extremely lightweight, alkaline battery-powered personal light features three ultra-bright LEDs.*

- Powered by 3 "N" alkaline batteries
- 3 ultra-bright white, 100,000-hour life LEDs provide up to 12 lumens
- Impact-resistant polymer
- Up to 120 hrs. continuous run time
- Momentary blink or constant-on tail switch
- 5.25"
- 2.1 oz.
- Available in yellow or black



Intrinsic Safety for Haz. Loc. Cl. I, II Div.1 Gr.ABCDFG CL.III T4A



Intrinsic Safety for Haz. Loc. Exia Cl. I, II Div.1 Gr.ABCDFG CL.III T4A



Meets applicable European Community Directives



II 1G EEx ia IIC T4 DEMKO 04 ATEX 0406954

## PROPOLYMER ACCESSORIES:



Helmet Clamps  
(2AA, 4AA, 4AA LED,  
4AA Luxeon)



Rubber Helmet Strap



Safety Wands  
(3C-XP, 4AA, 4AA LED, 4AA Luxeon)

Ring Holder  
(3C-XP)



Holster  
(3C, 3C LED, 3C  
Luxeon, 3C-XP, 3N,  
4AA, 4AA LED,  
4AA Luxeon)

Accessories Not Shown: Lanyard (3N)



Streamlight offers a variety of ultra-compact headlamps. Designed for comfort and durability, our adjustable, flexible, lightweight straps can be worn on the head or around a hard hat. The high powered professional grade lights offer power, versatility and longevity to accomplish any task.



# HEADLAMP SERIES

## ARGO™ HP LUXEON® LED

*Our brightest headlamp, with a high-flux Luxeon® LED that's seven times brighter than a regular LED and extra long runtime.*

- Powered by two 3 volt disposable lithium batteries
- 1 watt super high-flux Luxeon® LED with 50,000-hour life
- 24 lumens typical (high mode); 6 lumens typical (low mode)
- Solid State Power Regulation provides maximum light output throughout battery life
- 4.75 hrs. run time at regulated maximum intensity plus 3.5 additional hrs. of declining usable output, 20+ hours on low mode
- Impact-resistant housing
- Ultra-compact, lightweight for maximum comfort
- Includes elastic head strap and rubber hard hat strap
- Facecap diameter: 1.6"
- Max headlight width: 3.0"
- Max headlight depth: 2.0" including head strap and mounting plate
- 4.0 oz. with batteries (included)
- 90° tilting head
- Available in black



Includes a rubber head-strap that ensures a non-slip grip for hardhats.

CE Meets applicable European Community Directives

## ARGO™ LUXEON® HEADLAMP

*The Argo features Streamlight's state-of-the-art Luxeon technology for the long life and reliability of an LED with the brightness and range of a conventional bulb. It offers three digitally controlled brightness levels, a durable compact case, and rubber & elastic head straps for use with hard hats.*

- Powered by 3 "AAA" alkaline batteries; LED battery life indicator
- One watt Luxeon® LED
- Three brightness levels: 24 lumens (1 hr. runtime), 12 lumens (2.5 hrs.), 6 lumens (6.5 hrs.)
- 2.15" (H) x 2.9" (W) x 2.25" (D)
- 4.75 oz.
- 90° tilting head
- Available with yellow ABS case

CE Meets applicable European Community Directives





Rubber head-strap is included.



### TRIDENT® LED HEADLAMP

**Includes three LEDs and a xenon bulb in the same reflector. Three-position lighting lets you select the best combination of lights for the task at hand.**



Class I, Div. 2, Grps. A,B,C,D; Class II Div.2 Grps. F,G; Class III Temp. Code T3C



Class I, Div. 2, Grps. A,B,C,D; Class II Div.2 Grps. F,G; Class III Temp. Code T3C



Meets applicable European Community Directives

#### TWO TRIDENT MODELS:

**Yellow Model** – Contains 3 ultra-bright white LEDs

**Green Model** – Contains 1 safety green LED and 2 ultra-bright white LEDs

- Powered by 3 “AAA” alkaline batteries (included)
- 3 volt, 300 mA xenon bi-pin bulb, plus three 100,000-hour life LEDs
- 18 lumens typical (xenon); 7.5 lumens typical (3 LEDs)
- 3-position lighting: 1) xenon bulb; 2) one LED; 3) three LEDs
- Spot to flood focus
- Adjustable elastic head strap and rubber hard hat strap
- 90° tilting head
- Runs up to 150 hrs. (single LED)
- Facecap diameter: 1.86”
- Max width: 2.55”
- Max depth: 2.53” including head strap and mounting plate
- 4.64 oz.
- Available in yellow or green



# HEADLAMP SERIES



## SEPTOR® LED HEADLAMP

*This ultra-bright LED headlamp lets you choose 1, 3 or 7 LEDs.*

CE Meets applicable European Community Directives

- Powered by 3 "AAA" alkaline batteries (included)
- Seven 100,000 hr. life ultra-bright, white LEDs
- 17.5 lumens typical (7 LEDs), 7.5 lumens typical (3 LEDs), 2.5 lumens typical (1 LED)
- Runs up to 150 hrs. (single LED)
- Adjustable elastic head strap and rubber hard hat strap
- Facecap diameter: 1.86"
- Max width: 2.55"
- Max depth: 2.53" including head strap and mounting plate
- 4.72 oz.
- 90° tilting head
- Available in yellow