

2012

WORK FOOTWEAR



CONTENTS

ACCESSORIES	38
AMERICAN HERITAGE - JOB PRO	10
AMERICAN HERITAGE - SIGNATURE SERIES	11, 12, 13
AMERICAN HERITAGE - WEDGE	4, 5, 6, 7
AMERICAN HERITAGE - WORK	8, 9
GEN-FLEX²	16, 17, 18
GRAVITY HIKERS	19
I-MET[®] METATARSAL TECHNOLOGY	25, 26
I-MET^{2®} METATARSAL TECHNOLOGY	26
SHOE IN[®]	14, 15
“SEMI-OBLIQUE” SAFETY	24, 25
VGS (VISIBLE GEL SYSTEM)	20, 21, 23
WATERPROOF “BOXER” SERIES	22
POINT-OF-PURCHASE DISPLAYS	38
SOLE CHART	39
XLS WATERPROOF HIKER	23

PRODUCT CHANGE NOTICE

This Thorogood catalog is accurate as of the date of printing. However, in our never ending pursuit of better materials and construction there may be product specification changes made during the year without notice. The Thorogood price list is your official list of stock numbers available.

YOUR ASSURANCE OF QUALITY

For over 120 years Weinbrenner Shoe Company has built a tradition of quality and a reputation for value, innovation, and craftsmanship. Our customers are provided footwear products that are functional, responsive to their needs, and of the highest quality, reflecting the talents of the finest craftsmen.

Our company management / employee owners are committed to these ideals and the resources necessary to maintain them. Employees strive to satisfy customer needs by offering quality workmanship and the most responsive service in the footwear industry.

To further demonstrate its commitment, Weinbrenner has implemented a Quality Management System which conforms to the requirements of the International Standard ISO 9001.

Weinbrenner is an ISO 9001 Certified Shoe Company

108 S. Polk Street · Merrill, WI 54452 · 1-800-826-0002
WWW.WEINBRENNERUSA.COM

WOMEN'S SAFETY

Stock Number	PAGE
504-4312	26
504-4406	12

MEN'S SAFETY

Stock Number	PAGE
804-3550	10
804-3556	25
804-4019	19
804-4020	19
804-4061	20
804-4080	20
804-4082	20
804-4091	21
804-4092	21
804-4095	21, 23
804-4132	25
804-4200	7
804-4203	8
804-4204	8
804-4205	7
804-4208	7
804-4210	7
804-4312	26
804-4320	26
804-4364	7
804-4378	10
804-4379	10
804-4440	18
804-4441	18
804-4443	17
804-4445	16
804-4446	17
804-4448	18
804-4580	12
804-4590	13
804-4611	25
804-4612	24
804-4614	26
804-4650	24
804-4760	12

804-4800	23
804-4820	9
804-4821	9
804-4822	9
804-4823	9
804-4848	25
804-4860	11
804-4890	13
804-4895	13
804-4900	22
804-4908	22
804-4910	22
804-6000	12
804-6037	22
804-6444	17
804-6450	24

MEN'S NON-SAFETY

Stock Number	PAGE
633-1	4
814-3558	10
814-4009	6
814-4200	5
814-4201	6
814-4203	5
814-4208	6
814-4233	4
814-4355	5
814-4364	6
814-4376	10
814-4549	8
814-4550	8
814-4900	22
814-4960	11
814-6201	5

SHOE IN[®]

Stock Number	PAGE
161-0555	15
161-0777	15
161-0888	15
161-0999	15
161-7771	15

ORDER NOW



EMAIL ORDERS
csd@weinbrennerusa.com



WEB SITE ORDERS
DEALERS ONLY
www.weinbrennerusa.com / dealer
Login or create your account here



FAX ORDERS
800-569-6817



PHONE ORDERS
800-826-0002

To make your selection easier, we have included symbols that call your attention to important features built into the shoes throughout this catalog. Tested and certified to meet the rigid standards established by the American Standard Test Method (ASTM), all of our Safety Footwear meets or exceeds the highest ASTM F2413-11 ratings for impact, compression, and metatarsal.



**MADE IN THE USA
UNION MADE**



USA FEATURE SHOE indicates that this is a "Top Selling" style within a product category. It is our intention to maintain a large inventory on each of these styles for immediate delivery. Shoes that do not carry this icon, will be backed by normal inventory quantities, based on sales history.



SUPER SHOE indicates that this is a "Top Selling" style within a product category. It is our intention to maintain a large inventory on each of these styles for immediate delivery. We know that to grow we must be willing to invest in our customer's success. You should refer to this list first when bidding, contracting, or cataloging Thorogood Uniform Footwear. Shoes that do not carry this icon, will be backed by normal inventory quantities, based on sales history.

75

IMPACT: Class I/75 footwear retains a .500 inch (1/2 inch) for men's and .468 inch (15/32 inch) for women's or greater clearance after a nominal impact of 75 foot-pounds (101.7J), i.e., a 50 pound weight dropped from 18 inches reaching 117.9 ± 2.4 inches per second velocity at impact. **COMPRESSION:** Class C/75 footwear retains a .500 inch (1/2 inch) after compression of 2500 lbs. (11,121 N) or greater. Meets ASTM F2413-11 M I/75/C/75 ratings.

EH

ELECTRIC HAZARD Resistant Footwear (EH): Constructed or manufactured with electric shock resisting soles and heels capable of withstanding an application of 18,000 volts (root mean square (RMS) value) at 60 Hz for 1 minute with no current flow or leakage current in excess of 3.0 milliamperes under dry conditions. **Tested for and meets CAN/CSA-2195 ELECTRIC SHOCK RESISTANCE.**

SD

STATIC DISSIPATIVE: SD footwear will provide for a resistance of between 106 (1 meg ohm) and 108 (100 meg ohms) resistance when 50 volts are applied via an electrode to the hand of a person wearing the SD test sample on a conductive ground plate. SD footwear meets ASTM 2412-11 test requirements.

MT

METATARSAL: Class ASTM F2413-11 Mt/75 footwear retains a 1.0 inch clearance for men's and 15/32 inch clearance for women's, after a nominal impact of 75 foot pounds (101.7J), i.e., a 50 lb. weight dropped from 18 inches reaching 117.9 ± 2.4 inches per second velocity at impact 3.5 inches in from the toe of the footwear (3.375 inches on women's).

I-M

I-MET¹ Patented Technology: A breakthrough in metatarsal protection, exclusively from Thorogood features the only internal, invisible, Metatarsal Guard that's completely integrated with the safety toe cap.

I-M²

I-MET² Patented Technology: Exclusively from Thorogood Shoes & Work One Footwear. The polymer compound used in the I-MET² absorbs and deflects impact to the instep of the foot. Like the original I-MET, I-MET² is an internal, invisible, Metatarsal Guard that's completely integrated with the protective toe cap.

NM

NON-METALLIC UPPER: These styles are 100% non-metallic utilizing composite toes and non-metallic hardware (eyelets). These features will help minimize the chance of marking / scratching work surfaces and will not activate security screening devices.

PR

PUNCTURE RESISTING through the sole and heel area at a force load of less than 1200N (270 lbf) according to ASTM F 2412-11 / 2413-11, Standard Test Method for Foot Protection. Unique textile insole material is flexible and puncture resisting.

SR

SLIP RESISTING: Footwear meets or exceeds the ASTM F2913-11 SATRA Test Method TM144 Standard for slip resistance.

WP

SYMPATEX®: Breathable, waterproof lining/barrier capable of resisting BLOOD BORNE PATHOGENS. **THORO>DRI™:** A waterproof breathable lining/membrane with waterproof taped seams capable of resisting BLOOD BORNE PATHOGENS. **SEAM SEAL:** Constructed with waterproof upper materials that have all upper stitch seams sealed with a waterproof adhesive.



THOROGOOD®, THOROG RIP®, THORO>DRI™, THOROGOOD SOCKWEAR™, THOROGOOD OMEGA™, POLY-PILLOW FOOTPACER™, THE ULTIMATE®, ULTIMATE SHOCK ABSORPTION™, GENERATION FLEX™, MAXWEAR WEDGE™, SOFT STREETS™, I-MET®, HELLFIRE™, AND SHOE IN® are registered trademarks of the Weinbrenner Shoe Company, Inc.

VIBRAM® and the Yellow Octagonal Label are registered trademarks of Vibram S.p.A. of Italy Quabaug Corporation, North Brookfield, MA, is the North American manufacturer of Vibram soiling products under exclusive license. SYMPATEX® is a registered trademark of Sympatex Technologies GmbH. KEVLAR® is a registered trademark of DuPont. THINSULATE is a trademark of 3M. PORON® is a registered trademark of Rogers Corporation. DRI-LEX® is a registered trademark of Faytex Corporation. N.E.O.S.® is a registered trademark of New England Overshoe Company, Inc. MAXUM® is a registered trademark of Meramec Group. COOLMAX® is a registered trademark of Invista. L-PROTECTION® is a registered trademark of Lenzi Egisto S.p.A.

RETURNED GOODS POLICY

Weinbrenner Shoe Company stands 100% behind the quality, workmanship, and materials used in our products. Our Quality Control Department will determine if there is evidence of defective quality.

The procedure to return for inspection is as follows: Written permission must first be obtained from Weinbrenner Shoe Company. (If authorization to return has not been issued by WSC, the shipment may be refused.) Upon receipt, the Quality Control Department will inspect the products and a determination will be made. If defective, a replacement or credit will be issued, based upon the amount of wear the product has received.

Credit will not be issued for: abused footwear, excessive wear, or lack of a legitimate defect in material or workmanship.

When a defect is minor, the consumer may be happy with a quick and inexpensive repair. This would include eyelet, hook, D-ring, or rivet replacement, seam stitching, sole or heel reattachment, etc. Weinbrenner will reimburse or credit dealers, up to \$15 per pair for such repairs done at a local shoe repair shop. Just send a paid receipt to W.S.C. Customer Service for reimbursement / credit.

READ HOW THOROGOOD IS KEEPING AMERICA WORKING

My name is Frank and I am a Journeyman Carpenter with the Ohio and Vicinity regional Council of Carpenters Local 200 in Columbus, Ohio. Three years ago I purchased a pair of the Thorogood American Heritage 814-4201 Moc Toe work boot. I would just like to say that these have been the best work boots I have ever owned. I have had them resoled one time and have worn them daily to my job which is installing cabinets in newly built schools and hospitals all throughout Ohio. I work on a cement floor 10 hours per day, four to five days per week, and these comfortable shoes keep me working without foot problems.

I have finally wore them out and just purchased my second pair. I am writing you this letter to say thanks for a great product made with pride, and most of all would like to say how much I appreciate the fact that your shoes are still made in the USA by Union Workers. It is very admirable of your company to keep American workers working. To show my appreciation, I gave a short speech about your company and its products in front of all my Brother Carpenters at our local meeting this last Thursday evening.

I wore my new work boots to our meeting so that I could show the quality of your product. Keep America working, and thanks again for a great product.

Sincerely,
Frank

Frank

SEE PAGE 6



633-1

► ROOFER



UPPER:	Combination Tan Roughout and Brown Smooth Leather
CONSTRUCTION:	Goodyear Welt
LINING:	Comfort Weave Vamp
INSOLE:	Texon / Bontex
MIDSOLE:	Rubber
SHANK:	Engineered Composite
OUTSOLE:	Thorogood Dual Density Polyurethane Comfort Sole with 90° Heel
SPECIAL FEATURES:	Seam Reinforcement Rivets. Reinforce Stitch "Ball to Ball" on Outsole.

MEN'S SIZES

D 6-12, 13
E 7-12, 13

SOLE 35



814-4233

► LACE-TO-TOE ROOFER



UPPER:	Tobacco Gladiator Oil-Tanned Leather
CONSTRUCTION:	Goodyear Storm Welt
LINING:	Cotton Drill Vamp
INSOLE:	Removable Dual Density Ultimate Shock Absorption™ Footbed on Poron® 4000 Comfort Cushion
MIDSOLE:	Rubber
SHANK:	Engineered Composite
OUTSOLE:	Vibram® Christy Blown Rubber Wedge
SPECIAL FEATURES:	Seam Reinforcement Rivets.

MEN'S SIZES

D 6-12, 13, 14
EE 7-12, 13

SOLE 6



REPLACEMENT FOOTBED 889-6007



MADE IN




THE USA



814-4355

► 6" PLAIN TOE NON-SAFETY

	UPPER:	Tobacco Oil-Tanned Leather
	CONSTRUCTION:	Goodyear Storm Welt
SR	LINING:	Cotton Drill Vamp
	INSOLE:	Removable Dual Density Ultimate Shock Absorption™ Footbed on Poron® 4000 Comfort Cushion
	MIDSOLE:	Rubber
	SHANK:	Engineered Composite
	OUTSOLE:	Thorogood Exclusive MAXwear Wedge™

MEN'S SIZES	
D	7-12, 13, 14
EE	7-12, 13, 14
4E	8-12
SOLE 1	




REPLACEMENT FOOTBED
889-6007



814-4200

► 6" MOC TOE NON-SAFETY

	UPPER:	Tobacco Oil-Tanned Leather
	CONSTRUCTION:	Goodyear Storm Welt
SR	LINING:	Cotton Drill Vamp
	INSOLE:	Removable Dual Density Ultimate Shock Absorption™ Footbed on Poron® 4000 Comfort Cushion
	MIDSOLE:	Rubber
	SHANK:	Engineered Composite
	OUTSOLE:	Thorogood Exclusive MAXwear Wedge™

MEN'S SIZES	
B	9-12, 13
D	7-12, 13, 14
EE	7-12, 13, 14
SOLE 1	



REPLACEMENT FOOTBED
889-6007



814-4203

► 6" BROWN MOC TOE NON-SAFETY

	UPPER:	Dirty Brown Crazy Horse Leather
	CONSTRUCTION:	Goodyear Storm Welt
SR	LINING:	Cotton Drill Vamp
	INSOLE:	Removable Dual Density Ultimate Shock Absorption™ Footbed on Poron® 4000 Comfort Cushion
	MIDSOLE:	Rubber
	SHANK:	Engineered Composite
	OUTSOLE:	Vibram® Christy Blown Rubber Wedge

MEN'S SIZES	
D	7-12, 13, 14
EE	7-12, 13, 14
SOLE 6	




REPLACEMENT FOOTBED
889-6007



814-6201

► 6" BLACK MOC TOE NON-SAFETY

	UPPER:	Black Oil-Tanned Leather
	CONSTRUCTION:	Goodyear Storm Welt
SR	LINING:	Cotton Drill Vamp
	INSOLE:	Removable Dual Density Ultimate Shock Absorption™ Footbed on Poron® 4000 Comfort Cushion
	MIDSOLE:	Rubber
	SHANK:	Engineered Composite
	OUTSOLE:	Vibram® Christy Blown Rubber Wedge

MEN'S SIZES	
D	7-12, 13, 14
EE	7-12, 13, 14
SOLE 6	



REPLACEMENT FOOTBED
889-6007





814-4201

► 8" MOC TOE NON-SAFETY



UPPER:	Tobacco Oil-Tanned Leather
CONSTRUCTION:	Goodyear Storm Welt
LINING:	Cotton Drill Vamp
INSOLE:	Removable Dual Density Ultimate Shock Absorption™ Footbed on Poron® 4000 Comfort Cushion
MIDSOLE:	Rubber
SHANK:	Engineered Composite
OUTSOLE:	Thorogood Exclusive MAXwear Wedge™

MEN'S SIZES

B	9-12, 13
D	7-12, 13, 14
EE	7-12, 13, 14
4E	8-12

SOLE 1



REPLACEMENT FOOTBED
889-6007



814-4364

► 8" PLAIN TOE NON-SAFETY



UPPER:	Tobacco Oil-Tanned Leather
CONSTRUCTION:	Goodyear Storm Welt
LINING:	Cotton Drill Vamp
INSOLE:	Removable Dual Density Ultimate Shock Absorption™ Footbed on Poron® 4000 Comfort Cushion
MIDSOLE:	Rubber
SHANK:	Engineered Composite
OUTSOLE:	Thorogood Exclusive MAXwear Wedge™

MEN'S SIZES

B	9-12, 13, 14
D	7-12, 13, 14
EE	7-12, 13, 14
4E	8-12

SOLE 1



REPLACEMENT FOOTBED
889-6007



814-4009

► 8" WATERPROOF / INSULATED PLAIN TOE NON-SAFETY



MEN'S SIZES

D	7-12, 13, 14
EE	8-12, 13, 14
EEE	8-12, 13



814-4208

► WELLINGTON NON-SAFETY



UPPER:	Tobacco Oil-Tanned Leather
CONSTRUCTION:	Goodyear Storm Welt
LINING:	Cotton Drill Vamp
INSOLE:	Removable Dual Density Ultimate Shock Absorption™ Footbed on Poron® 4000 Comfort Cushion
MIDSOLE:	Rubber
SHANK:	Engineered Composite
OUTSOLE:	Thorogood Exclusive MAXwear Wedge™

MEN'S SIZES

D	7-12, 13, 14
EE	7-12, 13, 14

SOLE 1



REPLACEMENT FOOTBED
889-6007





804-4200

► 6" MOC TOE SAFETY TOE

	UPPER:	Tobacco Oil-Tanned Leather
	CONSTRUCTION:	Goodyear Storm Welt
75	LINING:	Cotton Drill Vamp
EH	INSOLE:	Removable Dual Density Ultimate Shock Absorption™ Footbed on Poron® 4000 Comfort Cushion
SR	MIDSOLE:	Rubber
	SHANK:	Engineered Composite
	OUTSOLE:	Thorogood Exclusive MAXwear Wedge™
	SPECIAL FEATURES:	ASTM F2413-11 M I/75/C/75 Steel Toe. EH Rated. Tested For and Meets CAN/CSA-Z195 18,000 Volts Electric Shock Resistance Standard.

MEN'S SIZES

D 8-12, 13, 14
EE 8-12, 13, 14

SOLE 1



REPLACEMENT FOOTBED
889-6007



804-4208

► 8" MOC TOE SAFETY TOE

	UPPER:	Tobacco Oil-Tanned Leather
	CONSTRUCTION:	Goodyear Storm Welt
75	LINING:	Cotton Drill Vamp
EH	INSOLE:	Removable Dual Density Ultimate Shock Absorption™ Footbed on Poron® 4000 Comfort Cushion
SR	MIDSOLE:	Rubber
	SHANK:	Engineered Composite
	OUTSOLE:	Thorogood Exclusive MAXwear Wedge™
	SPECIAL FEATURES:	ASTM F2413-11 M I/75/C/75 Steel Toe. EH Rated. Tested For and Meets CAN/CSA-Z195 18,000 Volts Electric Shock Resistance Standard.

MEN'S SIZES

D 7-12, 13, 14
EE 7½-12, 13, 14

SOLE 1



REPLACEMENT FOOTBED
889-6007



804-4364

► 8" PLAIN TOE SAFETY TOE

	UPPER:	Tobacco Oil-Tanned Leather
	CONSTRUCTION:	Goodyear Storm Welt
75	LINING:	Cotton Drill Vamp
EH	INSOLE:	Removable Dual Density Ultimate Shock Absorption™ Footbed on Poron® 4000 Comfort Cushion
SR	MIDSOLE:	Rubber
	SHANK:	Engineered Composite
	OUTSOLE:	Thorogood Exclusive MAXwear Wedge™
	SPECIAL FEATURES:	ASTM F2413-11 M I/75/C/75 Steel Toe. EH Rated. Tested For and Meets CAN/CSA-Z195 18,000 Volts Electric Shock Resistance Standard.

MEN'S SIZES

D 7-12, 13, 14
EE 7½-12, 13, 14
EEE 7½-12, 13

SOLE 1



REPLACEMENT FOOTBED
889-6007



804-4210

► 8" WATERPROOF / PLAIN TOE COMPOSITE SAFETY TOE

	75	EH	SR	WP	Thinsulate Ultra INSULATION	Sympatex
	SPECIAL FEATURES: ASTM F2413-11 M I/75/C/75 Composite Safety Toe. EH Rated. Tested For and Meets CAN/CSA-Z195 18,000 Volts Electric Shock Resistance Standard. Sympatex® WATERPROOF Barrier.					

MEN'S SIZES

D 8-12, 13, 14
EE 8-12, 13, 14

804-4205

► WELLINGTON SAFETY TOE

	UPPER:	Tobacco Oil-Tanned Leather
	CONSTRUCTION:	Goodyear Storm Welt
75	LINING:	Cotton Drill Vamp
EH	INSOLE:	Removable Dual Density Ultimate Shock Absorption™ Footbed on Poron® 4000 Comfort Cushion
SR	MIDSOLE:	Rubber
	SHANK:	Engineered Composite
	OUTSOLE:	Thorogood Exclusive MAXwear Wedge™
	SPECIAL FEATURES:	ASTM F2413-11 M I/75/C/75 Steel Toe. EH Rated. Tested For and Meets CAN/CSA-Z195 18,000 Volts Electric Shock Resistance Standard.

MEN'S SIZES

D 7-12, 13, 14
EE 7-12, 13, 14

SOLE 1



REPLACEMENT FOOTBED
889-6007





814-4550

► 6" AMERICAN HERITAGE NON-SAFETY



UPPER:	Tobacco Oil-Tanned Full Grain Leather
CONSTRUCTION:	Goodyear Storm Welt
LINING:	Comfort Weave
INSOLE:	Removable Dual Density Ultimate Shock Absorption™ Footbed on Poron® 4000 Comfort Cushion
MIDSOLE:	Rubber
SHANK:	Engineered Composite
OUTSOLE:	Thorogood Dual Density Polyurethane Comfort Sole with 90° Heel
SPECIAL FEATURES:	"Triple Stitched" Vamp and Counter. "Solid Antique Brass" Hardware. Security Stitch "Ball to Ball" on Outsole.

MEN'S SIZES

B	9-12, 13
D	7-12, 13, 14, 15, 16, 17, 18
EE	7-12, 13, 14, 15, 16, 17, 18
4E	8-12

SOLE 32



REPLACEMENT FOOTBED
889-6007



814-4549

► 8" AMERICAN HERITAGE NON-SAFETY



UPPER:	Tobacco Oil-Tanned Full Grain Leather
CONSTRUCTION:	Goodyear Storm Welt
LINING:	Comfort Weave
INSOLE:	Removable Dual Density Ultimate Shock Absorption™ Footbed on Poron® 4000 Comfort Cushion
MIDSOLE:	Rubber
SHANK:	Engineered Composite
OUTSOLE:	Thorogood Dual Density Polyurethane Comfort Sole with 90° Heel
SPECIAL FEATURES:	"Triple Stitched" Vamp and Counter. "Solid Antique Brass" Hardware. Security Stitch "Ball to Ball" on Outsole.

MEN'S SIZES

B	9-12, 13
D	7-12, 13, 14, 15, 16, 17, 18
EE	8-12, 13, 14, 15, 16, 17, 18
4E	8-12

SOLE 32



REPLACEMENT FOOTBED
889-6007



804-4203

► 6" AMERICAN HERITAGE SAFETY TOE



UPPER:	Black Walnut Oil-Tanned Leather
CONSTRUCTION:	Goodyear Storm Welt
LINING:	Comfort Weave
INSOLE:	Removable Dual Density Ultimate Shock Absorption™ Footbed on Poron® 4000 Comfort Cushion
MIDSOLE:	Rubber
SHANK:	Engineered Composite
OUTSOLE:	Thorogood Dual Density Polyurethane Comfort Sole with 90° Heel
SPECIAL FEATURES:	ASTM F2413-11 M I/75/C/75 Steel Toe. "Triple Stitched" Vamp and Counter. "Solid Antique Brass" Hardware. Security Stitch "Ball to Ball" on Outsole. EH Rated. Tested For and Meets CAN/CSA-Z195 18,000 Volts Electric Shock Resistance Standard.

MEN'S SIZES

B	9-12, 13
D	7-12, 13, 14, 15, 16, 17, 18
EE	8-12, 13, 14
EEE	8-12, 13, 14, 15, 16, 17, 18

SOLE 32



REPLACEMENT FOOTBED
889-6007



804-4204

► 8" AMERICAN HERITAGE SAFETY TOE



UPPER:	Black Walnut Oil-Tanned Leather
CONSTRUCTION:	Goodyear Storm Welt
LINING:	Comfort Weave
INSOLE:	Removable Dual Density Ultimate Shock Absorption™ Footbed on Poron® 4000 Comfort Cushion
MIDSOLE:	Rubber
SHANK:	Engineered Composite
OUTSOLE:	Thorogood Dual Density Polyurethane Comfort Sole with 90° Heel
SPECIAL FEATURES:	ASTM F2413-11 M I/75/C/75 Steel Toe. "Triple Stitched" Vamp and Counter. "Solid Antique Brass" Hardware. Security Stitch "Ball to Ball" on Outsole. EH Rated. Tested For and Meets CAN/CSA-Z195 18,000 Volts Electric Shock Resistance Standard.

MEN'S SIZES

B	9-12, 13
D	7-12, 13, 14, 15, 16, 17, 18
EE	8-12, 13, 14
EEE	8-12, 13, 14, 15, 16, 17, 18

SOLE 32



REPLACEMENT FOOTBED
889-6007





804-4820

► 6" AMERICAN HERITAGE SAFETY TOE

	UPPER:	Tobacco Oil-Tanned Full Grain Leather
	CONSTRUCTION:	Goodyear Storm Welt
75	LINING:	Comfort Weave Vamp
EH	INSOLE:	Removable Dual Density Polyurethane "SHOCK ZONE" Footbed with Air Flow Vents
SR	MIDSOLE:	Polyurethane
	SHANK:	Engineered Composite
	OUTSOLE:	Thorogood Dual Density Polyurethane Comfort Sole with 90° Heel
	SPECIAL FEATURES:	ASTM F2413-11 M I/75/C/75 Steel Toe. "Unlined" Shaft. "Triple Stitched" Vamp and Counter. "Solid Antique Brass" Hardware. Security Stitch "Ball to Ball" on Outsole. EH Rated. Tested For and Meets CAN/CSA-Z195 18,000 Volts Electric Shock Resistance Standard.

MEN'S SIZES

D 8-12, 13, 14
EEE 8-12, 13

SOLE 32



REPLACEMENT FOOTBED
889-8000



804-4821

► 8" AMERICAN HERITAGE SAFETY TOE

	UPPER:	Tobacco Oil-Tanned Full Grain Leather
	CONSTRUCTION:	Goodyear Storm Welt
75	LINING:	Comfort Weave Vamp
EH	INSOLE:	Removable Dual Density Polyurethane "SHOCK ZONE" Footbed with Air Flow Vents
SR	MIDSOLE:	Polyurethane
	SHANK:	Engineered Composite
	OUTSOLE:	Thorogood Dual Density Polyurethane Comfort Sole with 90° Heel
	SPECIAL FEATURES:	ASTM F2413-11 M I/75/C/75 Steel Toe. "Unlined" Shaft. "Triple Stitched" Vamp and Counter. "Solid Antique Brass" Hardware. Security Stitch "Ball to Ball" on Outsole. EH Rated. Tested For and Meets CAN/CSA-Z195 18,000 Volts Electric Shock Resistance Standard.

MEN'S SIZES

D 8-12, 13, 14
EEE 8-12, 13,

SOLE 32



REPLACEMENT FOOTBED
889-8000



804-4822

► AMERICAN HERITAGE WELLINGTON SAFETY TOE

	UPPER:	Tobacco Oil-Tanned Full Grain Leather
	CONSTRUCTION:	Goodyear Storm Welt
75	LINING:	Comfort Weave Vamp
EH	INSOLE:	Removable Dual Density Polyurethane "SHOCK ZONE" Footbed with Air Flow Vents
SR	MIDSOLE:	Polyurethane
	SHANK:	Engineered Composite
	OUTSOLE:	Thorogood Dual Density Polyurethane Comfort Sole with 90° Heel
	SPECIAL FEATURES:	ASTM F2413-11 M I/75/C/75 Steel Toe. "Unlined" Shaft. Security Stitch "Ball to Ball" on Outsole. EH Rated. Tested For and Meets CAN/CSA-Z195 18,000 Volts Electric Shock Resistance Standard.

MEN'S SIZES

D 7-12, 13, 14
EEE 7-12, 13, 14

SOLE 32



REPLACEMENT FOOTBED
889-8000



804-4823

► "OIL RIG" WELLINGTON SAFETY TOE

	UPPER:	Mahogany "Oil Rig" Leather
	CONSTRUCTION:	Goodyear Storm Welt
75	LINING:	Comfort Weave Vamp
EH	INSOLE:	Removable Dual Density Polyurethane "SHOCK ZONE" Footbed with Air Flow Vents
SR	MIDSOLE:	Rubber
	SHANK:	Engineered Composite
	OUTSOLE:	Thorogood Dual Density Polyurethane Comfort Sole with 90° Heel
	SPECIAL FEATURES:	ASTM F2413-11 M I/75/C/75 Steel Toe. "Unlined" Shaft. Security Stitch "Ball to Ball" on Outsole. EH Rated. Tested For and Meets CAN/CSA-Z195 18,000 Volts Electric Shock Resistance Standard.

MEN'S SIZES

B 4-12, 13
D 4-12, 13, 14, 15
EE 8-12, 13, 14



SOLE 32



REPLACEMENT FOOTBED
889-8000



▲ For Women's size order Men's size above it (i.e.: Women's 6, order Men's 4, etc.). Women's Medium = Men's B Width, Women's Wide = Men's D Width

Men's	3	3½	4	4½	5	5½	6	6½	7	7½	8	8½	9	9½	10	10½	11	11½	12	13	14	15
Women's	5	5½	6	6½	7	7½	8	8½	9	9½	10	10½	11	11½	12							



NEW

814-4376

► 6" MOC TOE NON-SAFETY

	UPPER:	Brown Trail Crazyhorse Oil-Tanned Leather
	CONSTRUCTION:	Goodyear Storm Welt
SR	LINING:	Cotton Drill Vamp
	INSOLE:	Removable Dual Density Ultimate Shock Absorption™ Footbed on Poron® 4000 Comfort Cushion
	MIDSOLE:	Rubber
	SHANK:	Engineered Composite
	OUTSOLE:	Polyurethane "White 90" Comfort Sole

MEN'S SIZES

D 8-12, 13, 14
EE 8-12, 13, 14

SOLE 7



REPLACEMENT FOOTBED
889-6007



NEW

804-4378

► 8" MOC TOE SAFETY TOE

	UPPER:	Brown Trail Crazyhorse Oiled-Tanned Leather
	CONSTRUCTION:	Goodyear Storm Welt
75	LINING:	Cotton Drill Vamp
EH	INSOLE:	Removable Dual Density Ultimate Shock Absorption™ Footbed on Poron® 4000 Comfort Cushion
SR	MIDSOLE:	Rubber
	SHANK:	Engineered Composite
	OUTSOLE:	Polyurethane "White 90" Comfort Sole
	SPECIAL FEATURES:	ASTM F2413-11 M I/75/C/75 Steel Toe. EH Rated. Tested For and Meets CAN/CSA-Z195 18,000 Volts Electric Shock Resistance Standard.

MEN'S SIZES

D 8-12, 13, 14
EE 8-12, 13, 14

SOLE 7



REPLACEMENT FOOTBED
889-6007



NEW

804-4379

► 8" PLAIN TOE SAFETY TOE

	UPPER:	Brown Trail Crazyhorse Oiled-Tanned Leather
	CONSTRUCTION:	Goodyear Storm Welt
75	LINING:	Cotton Drill Vamp
EH	INSOLE:	Removable Dual Density Ultimate Shock Absorption™ Footbed on Poron® 4000 Comfort Cushion
SR	MIDSOLE:	Rubber
	SHANK:	Engineered Composite
	OUTSOLE:	Polyurethane "White 90" Comfort Sole
	SPECIAL FEATURES:	ASTM F2413-11 M I/75/C/75 Steel Toe. EH Rated. Tested For and Meets CAN/CSA-Z195 18,000 Volts Electric Shock Resistance Standard.

MEN'S SIZES

D 8-12, 13, 14
EE 8-12, 13, 14

SOLE 7



REPLACEMENT FOOTBED
889-6007



804-3550

► 8" WATERPROOF / INSULATED LOGGER SAFETY TOE

	UPPER:	Brown Trail Crazyhorse Oil-Tanned Leather
	CONSTRUCTION:	Goodyear Leather Storm Welt
75	INSULATION:	B-400 Thinsulate™ Ultra Insulation
EH	INSOLE:	Removable Dual Density Ultimate Shock Absorption™ Footbed on Poron® 4000 Comfort Cushion
SR	MIDSOLE:	Rubber
WP	SHANK:	Steel Triple Ladder Shank
	OUTSOLE:	Vibram® Tacoma Logger
	SPECIAL FEATURES:	ASTM F2413-11 M I/75/C/75 Steel Toe. "Triple Stitched" Vamp and Counter. "Solid Brass" Hardware. Security "Tip" Stitch on Outsole. EH Rated. Tested For and Meets CAN/CSA-Z195 18,000 Volts Electric Shock Resistance Standard. Sympatex® WATERPROOF Barrier.

MEN'S SIZES

D 8-12, 13, 14
EEE 8-12, 13, 14

SOLE 3



REPLACEMENT FOOTBED
889-6007



Thinsulate™ Ultra
INSULATION

MEN'S SIZES

D 8-12, 13, 14
EEE 8-12, 13, 14

NEW



814-3558

► 8" WATERPROOF / INSULATED LOGGER NON-SAFETY

	SR	WP	
			SPECIAL FEATURES: "Triple Stitched" Vamp and Counter. "Solid Brass" Hardware. Security "Tip" Stitch on Outsole. Sympatex® WATERPROOF Barrier.




THE MOST COMFORTABLE WORK BOOTS
 ★ **MADE IN THE USA** ★



804-4860

► **6" SPORT HIKER SAFETY TOE**

	UPPER:	Root Beer Old West Tumbled Full Grain Leather
75	CONSTRUCTION:	Direct Injection
EH	LINING:	Forest Green Dri-Lex®
SR	INSOLE:	Removable Dual Density Polyurethane "SHOCK ZONE" Footbed
	SHANK:	Engineered Composite
	OUTSOLE:	SoftStreets™ Dual Density Polyurethane
	SPECIAL FEATURES:	ASTM F2413-11 M I/75/C/75 Steel Toe. EH Rated. Tested For and Meets CAN/CSA-Z195 18,000 Volts Electric Shock Resistance Standard.

MEN'S SIZES

M	7-12, 13, 14
W	7-12, 13, 14

SOLE 12



REPLACEMENT FOOTBED 889-8000



814-4960

► **6" SPORT HIKER NON-SAFETY**



MEN'S SIZES

M	7-12, 13, 14
W	7½-12, 13, 14





504-4406

► WOMEN'S DOUBLE TRACK OXFORD SAFETY TOE

	UPPER:	Root Beer Old West Tumbled Full Grain Leather With Contrast Stitch
75	CONSTRUCTION:	Direct Injection
	LINING:	Forest Green Dri-Lex®
EH	INSOLE:	Removable Polyurethane "Super Cushion" Footbed
SR	SHANK:	Engineered Composite
	OUTSOLE:	SoftStreets™ Dual Density Polyurethane
	SPECIAL FEATURES:	ASTM F2413-11 M I/75/C/75 Steel Toe. EH Rated. Tested For and Meets CAN/CSA-Z195 18,000 Volts Electric Shock Resistance Standard.

WOMEN'S SIZES

M 6-11
W 6-11

SOLE 12



REPLACEMENT FOOTBED
589-6008



804-4760

► PLAIN TOE OXFORD SAFETY TOE

	UPPER:	Root Beer Old West Tumbled Full Grain Leather
75	CONSTRUCTION:	Direct Injection
	LINING:	Forest Green Dri-Lex®
EH	INSOLE:	Removable Dual Density Polyurethane "SHOCK ZONE" Footbed
SR	SHANK:	Engineered Composite
	OUTSOLE:	SoftStreets™ Dual Density Polyurethane
	SPECIAL FEATURES:	ASTM F2413-11 M I/75/C/75 Steel Toe. EH Rated. Tested For and Meets CAN/CSA-Z195 18,000 Volts Electric Shock Resistance Standard.

MEN'S SIZES

M 7-12, 13, 14
W 7-12, 13, 14

SOLE 12



REPLACEMENT FOOTBED
889-8000



804-6000

► 6" SPORT HIKER SAFETY TOE

	UPPER:	Black Tumbled Full Grain Leather
75	CONSTRUCTION:	Direct Injection
	LINING:	Forest Green Dri-Lex®
EH	INSOLE:	Removable Dual Density Polyurethane "SHOCK ZONE" Footbed
SR	SHANK:	Engineered Composite
	OUTSOLE:	SoftStreets™ Dual Density Polyurethane
	SPECIAL FEATURES:	ASTM F2413-11 M I/75/C/75 Steel Toe. EH Rated. Tested For and Meets CAN/CSA-Z195 18,000 Volts Electric Shock Resistance Standard.

MEN'S SIZES

M 7-12, 13, 14
W 8-12, 13, 14

SOLE 12



REPLACEMENT FOOTBED
889-8000



804-4580

► WELLINGTON SAFETY TOE

	UPPER:	Root Beer Old West Tumbled Full Grain Leather
75	CONSTRUCTION:	Direct Injection
	LINING:	Forest Green Dri-Lex®
EH	INSOLE:	Removable Dual Density Polyurethane "SHOCK ZONE" Footbed
SR	SHANK:	Engineered Composite
	OUTSOLE:	SoftStreets™ Dual Density Polyurethane
	SPECIAL FEATURES:	ASTM F2413-11 M I/75/C/75 Steel Toe. "Unlined" Shaft. EH Rated. Tested For and Meets CAN/CSA-Z195 18,000 Volts Electric Shock Resistance Standard.

MEN'S SIZES

M 7-12, 13, 14
W 7-12, 13, 14

SOLE 12



REPLACEMENT FOOTBED
889-8000





804-4890

▶ 6" SPORT HIKER SAFETY TOE

	UPPER:	Dirty Brown Crazy Horse Leather
	CONSTRUCTION:	Direct Injection
75	LINING:	Forest Green Dri-Lex®
EH	INSOLE:	Removable Dual Density Polyurethane "SHOCK ZONE" Footbed
SR	SHANK:	Engineered Composite
	OUTSOLE:	SoftStreets™ Dual Density Polyurethane
	SPECIAL FEATURES:	ASTM F2413-11 M I/75/C/75 Steel Toe. EH Rated. Tested For and Meets CAN/CSA-Z195 18,000 Volts Electric Shock Resistance Standard.

MEN'S SIZES

D 8-12, 13, 14
EE 8-12, 13, 14

SOLE 12



REPLACEMENT FOOTBED
889-8000



804-4895

▶ 6" WATERPROOF / INSULATED SPORT BOOT SAFETY TOE

	UPPER:	Dirty Brown Crazy Horse Leather
	CONSTRUCTION:	Direct Injection
75	INSULATION:	B-400 Thinsulate™ Ultra Insulation
EH	LINING:	Forest Green Dri-Lex®
SR	INSOLE:	Removable Dual Density Polyurethane "SHOCK ZONE" Footbed
WP	SHANK:	Engineered Composite
	OUTSOLE:	SoftStreets™ Dual Density Polyurethane
	SPECIAL FEATURES:	Seam Sealed Waterproof Construction. ASTM F2413-11 M I/75/C/75 Steel Toe. EH Rated. Tested For and Meets CAN/CSA-Z195 18,000 Volts Electric Shock Resistance Standard.

MEN'S SIZES

D 8-12, 13, 14
EE 8-12, 13, 14

SOLE 12



REPLACEMENT FOOTBED
889-8000



Thinsulate™ Ultra
INSULATION



804-4590

▶ WELLINGTON SAFETY TOE

	UPPER:	Dirty Brown Crazy Horse Leather
	CONSTRUCTION:	Direct Injection
75	LINING:	Forest Green Dri-Lex®
EH	INSOLE:	Removable Dual Density Polyurethane "SHOCK ZONE" Footbed
SR	SHANK:	Engineered Composite
	OUTSOLE:	SoftStreets™ Dual Density Polyurethane
	SPECIAL FEATURES:	ASTM F2413-11 M I/75/C/75 Steel Toe. "Unlined" Shaft. EH Rating. Tested For and Meets CAN/CSA-Z195 18,000 Volts Electric Shock Resistance Standard.

MEN'S SIZES

D 8-12, 13, 14
EE 8-12, 13, 14

SOLE 12



REPLACEMENT FOOTBED
889-8000



Give Dirt the Boot:

Keep Shoes On While Going In and Out of the House/Business



Keep Floors Clean

- Ultra Lightweight EVA 
- They Go On and Off Hands Free
- No Left/Right
- Rinse Clean Easily
- Two Slip Resisting Rubber Pads
- Fits Over Most Shoes or Boots with Unique Patented Design
- Flex Groove Design on Closed Toe Option

Each overshoe comes with a convenient backpack!


PATENTED TECHNOLOGY



161-0777



Keep Shoes Clean

 fits over most shoes and boots.



161-0888



161-0555



Get a Grip

Take a quick trip into the elements without having to put on boots. Shoe In with Ice-Ts (Ice Traction System) protect footwear and reduce slipping.

WEINBRENNER SHOE COMPANY • ISO 9001 CERTIFIED

108 S. POLK STREET • MERRILL, WISCONSIN 54452

1-800-826-0002 • WWW.WEINBRENNERUSA.COM • WWW.SHOEINONLINE.COM



161-0777

► CHARCOAL OPEN TOE

SPECIAL FEATURES: Lightweight EVA. Hands Free. No Left/Right. Rinse Off. Two Slip Resisting Rubber Pads. Fits Over Most Shoes or Boots With Unique Patented Design.

	MEN'S	WOMEN'S
S	5-8½	7-9½
M	9-11	10-11½
L	11½-12	12+
XL	13+	

SOLE 40



161-7771

► FOREST GREEN OPEN TOE

SPECIAL FEATURES: Lightweight EVA. Hands Free. No Left/Right. Rinse Off. Two Slip Resisting Rubber Pads. Fits Over Most Shoes or Boots With Unique Patented Design.

161-0888



► CHARCOAL CLOSED TOE NON-SAFETY

SPECIAL FEATURES: Lightweight EVA. Hands Free. No Left/Right. Rinse Off. Two Slip Resisting Rubber Pads. Flex Groove Design. Fits Over Most Shoes or Boots With Unique Patented Design.

	MEN'S	WOMEN'S
S	5-8½	7-9½
M	9-11	10-11½
L	11½-12	12+
XL	13+	

SOLE 40



161-0555



► CHARCOAL CLOSED TOE ICE TRACTION SYSTEM

SPECIAL FEATURES: Kick on over your shoes for traction on ice, snow, and mud. Lightweight EVA. Hands Free. No Left/Right. Rinse Off. Two Slip Resisting Rubber Pads. Flex Groove Design. Fits Over Most Shoes or Boots With Unique Patented Design.

	MEN'S	WOMEN'S
S	5-8½	7-9½
M	9-11	10-11½
L	11½-12	12+
XL	13+	

SOLE 41



161-0999



► CHARCOAL CLOSED TOE SAFETY TOE

SPECIAL FEATURES: Steel Toe - Tested To, But Not Compliant With ASTM F2413-11. Lightweight EVA. Hands Free. No Left/Right. Rinse Off. Two Slip Resisting Rubber Pads. Flex Groove Design. Fits Over Most Shoes or Boots for Temporary Safety Toe Protection.

	MEN'S	WOMEN'S
S	5-8½	7-9½
M	9-11	10-11½
L	11½-12	12+
XL	13+	

SOLE 40




Your Shoe In is made of high quality EVA material for lasting comfort. The shoe you wear with any Shoe In will determine proper fit. No Shoe In should be used for climbing or running as this may pose a potential trip hazard. Do not wear Shoe Ins while driving. Your Shoe In cannot prevent all slips and falls. Shoe In with Ice-Ts (Ice Traction System) should not be worn on non-ice covered surfaces. Shoe In with Safety Toes is tested to the ASTM F2413-11 Standard but cannot comply with the standard. The ASTM F2413-11 Standard states no overshoe can meet or comply with the standard.

GEN-flex² VGS TECHNOLOGY



GEN-FLEX²

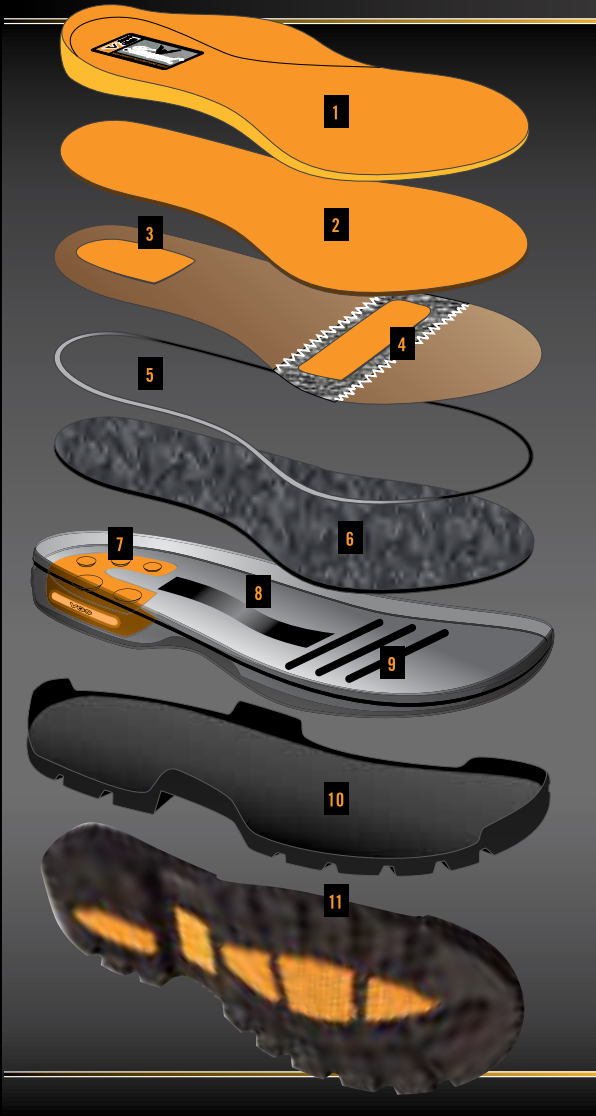

GEN-flex² / VGS technology combines premium materials with an exclusive, flex-enhancing welt construction and maximum comfort.

- 1 High Density Polyurethane Removable Footbed
- 2 High Density EVA Footbed For Extra Comfort
- 3 Gen-flex² Board with Double EVA Cushion
- 4 Gen-flex² Forefoot Flexibility
- 5 Gen-flex² Flexible Insole Rib
- 6 Gen-flex² Welt Channel Cushion
- 7 InterActive Visible Gel System (VGS)
- 8 Gen-flex² Built-in Composite Shank
- 9 Gen-flex² Molded EVA Midsole Flex Channel
- 10 Gen-flex² Oil/Slip Resisting Rubber Outsole
- 11 Gen-flex² Multi-directional Traction Lug Design



804-4445

► 6" LACE-TO-TOE **COMPOSITE SAFETY TOE**

75	UPPER:	Brown Tumbled Oiled Full Grain Leather
EH	CONSTRUCTION:	Goodyear Storm Welt
SR	LINING:	Spacer Mesh
	INSOLE:	Polyurethane Removable Footbed / Special EVA Cushion Flex
	MIDSOLE:	Compression Molded EVA with Impact 300 Gel Heel Insert
	SHANK:	Engineered Composite
	OUTSOLE:	Gen-flex ² Dual Density Rubber
	SPECIAL FEATURES:	ASTM F2413-11 M I/75/C/75 Composite Safety Toe. EH Rated. Tested For and Meets CAN/CSA-Z195 18,000 Volts Electric Shock Resistance Standard. Flexible Welt Net Fit Outsole. Abrasion Resisting Rubber Toe and Side Bumpers. Anti-Roll Bar Heel Support (ABHS).

MEN'S SIZES

M	7-12, 13, 14
W	7-12, 13, 14

SOLE 26



COMPOSITE

75



NEW



804-4443

► 6" WATERPROOF MOC TOE COMPOSITE SAFETY TOE

75	UPPER:	Brown WATERPROOF Tumbled Oiled Full Grain Leather
EH	CONSTRUCTION:	Goodyear Storm Welt
SR	LINING:	Spacer Mesh / Comfort Weave
WP	INSOLE:	Polyurethane Removable Footbed / Special EVA Cushion Flex
	MIDSOLE:	Compression Molded EVA with Impact 300 Gel Heel Insert
	SHANK:	Engineered Composite
	OUTSOLE:	Gen-flex ² Dual Density Rubber
	SPECIAL FEATURES:	100% Non-Metallic. ASTM F2413-11 M I/75/C/75 Composite Safety Toe . EH Rated. Tested For and Meets CAN/CSA-Z195 18,000 Volts Electric Shock Resistance Standard . Anti-Roll Bar Heel Support (ABHS). Goodyear Welt: Flexible Net Fit Outsole. Thoro-dri™ WATERPROOF System.

MEN'S SIZES

M 7-12, 13, 14
W 7-12, 13, 14

SOLE 26



Thoro-dri



NEW



804-6444

► 6" LACE-TO-TOE COMPOSITE SAFETY TOE

75	UPPER:	Black Oiled Full Grain Leather
EH	CONSTRUCTION:	Goodyear Storm Welt
SR	LINING:	Spacer Mesh / Comfort Weave
	INSOLE:	Polyurethane Removable Footbed / Special EVA Cushion Flex
	MIDSOLE:	Compression Molded EVA with Impact 300 Gel Heel Insert
	SHANK:	Engineered Composite
	OUTSOLE:	Gen-flex ² Dual Density Rubber
	SPECIAL FEATURES:	100% Non-Metallic. ASTM F2413-11 M I/75/C/75 Composite Safety Toe . EH Rated. Tested For and Meets CAN/CSA-Z195 18,000 Volts Electric Shock Resistance Standard . Anti-Roll Bar Heel Support (ABHS). Goodyear Welt: Flexible Net Fit Outsole.

MEN'S SIZES

M 7-12, 13, 14
W 7-12, 13, 14

SOLE 26



NEW



804-4446

► 6" PLAIN TOE COMPOSITE SAFETY TOE

75	UPPER:	Brown Tumbled Oiled Full Grain Leather
EH	CONSTRUCTION:	Goodyear Storm Welt
SR	LINING:	Spacer Mesh
	INSOLE:	Polyurethane Removable Footbed / Special EVA Cushion Flex
	MIDSOLE:	Compression Molded EVA with Impact 300 Gel Heel Insert
	SHANK:	Engineered Composite
	OUTSOLE:	Gen-flex ² Dual Density Rubber
	SPECIAL FEATURES:	ASTM F2413-11 M I/75/C/75 Composite Safety Toe . EH Rated. Tested For and Meets CAN/CSA-Z195 18,000 Volts Electric Shock Resistance Standard . Anti-Roll Bar Heel Support (ABHS).

MEN'S SIZES

M 7-12, 13, 14
W 7-12, 13, 14

SOLE 26





804-4448

► 8" PLAIN TOE COMPOSITE SAFETY TOE

75	UPPER:	Brown Tumbled Oiled Full Grain Leather
	CONSTRUCTION:	Goodyear Storm Welt
EH	LINING:	Spacer Mesh
SR	INSOLE:	Polyurethane Removable Footbed / Special EVA Cushion Flex
	MIDSOLE:	Compression Molded EVA with Impact 300 Gel Heel Insert
	SHANK:	Engineered Composite
	OUTSOLE:	Gen-flex ² Dual Density Rubber
	SPECIAL FEATURES:	ASTM F2413-11 M I/75/C/75 Composite Safety Toe. EH Rated. Tested For and Meets CAN/CSA-Z195 18,000 Volts Electric Shock Resistance Standard. Anti-Roll Bar Heel Support (ABHS).

MEN'S SIZES	
M	7-12, 13, 14
W	7-12, 13, 14
SOLE 26	



804-4440

► SIDE-ZIP WELLINGTON COMPOSITE SAFETY TOE

75	UPPER:	Brown Tumbled Oiled Full Grain Leather
	CONSTRUCTION:	Goodyear Storm Welt
EH	LINING:	Spacer Mesh
SR	INSOLE:	Polyurethane Removable Footbed / Special EVA Cushion Flex
	MIDSOLE:	Compression Molded EVA with Impact 300 Gel Heel Insert
	SHANK:	Engineered Composite
	OUTSOLE:	Gen-flex ² Dual Density Rubber
	SPECIAL FEATURES:	ASTM F2413-11 M I/75/C/75 Composite Safety Toe. EH Rated. Tested For and Meets CAN/CSA-Z195 18,000 Volts Electric Shock Resistance Standard. Flexible Welt Net Fit Outsole. Heavy Duty YKK Side Zipper. Anti-Roll Bar Heel Support (ABHS).

MEN'S SIZES	
M	7-12, 13, 14
W	7-12, 13, 14
SOLE 26	



804-4441

► WATERPROOF NYLON WELLINGTON COMPOSITE SAFETY TOE

75	UPPER:	1200 Denier Nylon / Brown WATERPROOF Full Grain Leather
	CONSTRUCTION:	Goodyear Storm Welt
EH	LINING:	Comfort Weave
SR	INSOLE:	Polyurethane Removable Footbed / Special EVA Cushion Flex
WP	MIDSOLE:	Compression Molded EVA with Impact 300 Gel Heel Insert
	SHANK:	Engineered Composite
	OUTSOLE:	Gen-flex ² Dual Density Rubber
	SPECIAL FEATURES:	ASTM F 2413-05 M I/75/C/75 Composite Safety Toe. EH Rated. Tested For and Meets CAN/CSA-Z195 18,000 Volts Electric Shock Resistance Standard. Anti-Roll Bar Heel Support (ABHS). Goodyear Welt: Flexible Net Fit Outsole. Thoro>dri™ WATERPROOF System.

MEN'S SIZES	
M	7-12, 13, 14
W	7-12, 13, 14
SOLE 26	



Thoro>dri™

804-4019



► GRAVITY SPORT OXFORD **COMPOSITE SAFETY TOE**

75	UPPER:	Brown Suede Leather / Nylon
	CONSTRUCTION:	Cement
EH	LINING:	Two Zone Wicking Mesh
NM	INSOLE:	Full Length Removable Polyurethane Footbed
	MIDSOLE:	Compression Molded EVA
SR	SHANK:	Engineered Composite
	OUTSOLE:	Gravity® Rubber Sole with Integrated Toe Bumper and 150 NBS Abrasion Rating
	SPECIAL FEATURES:	100% Non-Metallic. ASTM F2413-11 M I/75/C/75. Composite Safety Toe. EH Rated. Tested For and Meets CAN/CSA-Z195 18,000 Volts Electric Shock Resistance Standard. Molded Rubber Heel Stabilizer.



MEN'S SIZES

M	4-12, 13, 14
W	5-12, 13, 14



SOLE 31



804-4020



► GRAVITY SPORT HIKER **COMPOSITE SAFETY TOE**

75	UPPER:	Brown Suede Leather / Nylon
	CONSTRUCTION:	Cement
EH	LINING:	Two Zone Wicking Mesh
NM	INSOLE:	Full Length Removable Polyurethane Footbed
	MIDSOLE:	Compression Molded EVA
SR	SHANK:	Engineered Composite
	OUTSOLE:	Gravity® Rubber Sole with Integrated Toe Bumper and 150 NBS Abrasion Rating
	SPECIAL FEATURES:	100% Non-Metallic. ASTM F2413-11 M I/75/C/75. Composite Safety Toe. EH Rated. Tested For and Meets CAN/CSA-Z195 18,000 Volts Electric Shock Resistance Standard. Molded Rubber Heel Stabilizer.



MEN'S SIZES

M	4-12, 13, 14
W	5-12, 13, 14



SOLE 31



▲ For Women's size order Men's size above it (i.e.: Women's 6, order Men's 4, etc.). Women's Medium = Men's B Width, Women's Wide = Men's D Width

Men's	3	3½	4	4½	5	5½	6	6½	7	7½	8	8½	9	9½	10	10½	11	11½	12	13	14	15
Women's	5	5½	6	6½	7	7½	8	8½	9	9½	10	10½	11	11½	12							

VGS

SD



- ▲ Rocky Brown Crazy Horse Full Grain Leather
- ▲ Removable Dual Density Polyurethane Cushioned SD Footbed
- ▲ Full Length EVA Shock Absorbing Cushioned Insole
- ▲ InterActive Visible Gel System (VGS) Absorbs Impact and Provides Maximum Comfort
- ▲ Exclusive Thorogood Slip Resisting Outsole with a Compression Molded EVA Midsole for Athletic Performance
- 100% Non-metallic



VISIBLE GEL SYSTEM

804-4082

804-4080

► VGS SD SPORT OXFORD COMPOSITE SAFETY TOE



75	UPPER:	Rocky Brown Crazy Horse Full Grain Leather
	CONSTRUCTION:	Cement
SD	LINING:	Heavy Duty Nylex
NM	INSOLE:	Removable Polyurethane "Ultimate® SD" Footbed
SR	MIDSOLE:	Compression Molded EVA with Impact 300 Gel Heel Insert
	SHANK:	Engineered Composite
	OUTSOLE:	VGS 300 Traction Rubber
	SPECIAL FEATURES:	100% Non-Metallic. ASTM F2413-11 M I/75/C/75 Composite Safety Toe. Static Dissipative, Meets ASTM 2412-11 Test Requirements.

MEN'S SIZES

M 4-12, 13, 14
W 4-12, 13, 14



SOLE 33



REPLACEMENT FOOTBED 889-6017



804-4082

► VGS SD SPORT HIKER COMPOSITE SAFETY TOE



75	UPPER:	Rocky Brown Crazy Horse Full Grain Leather
	CONSTRUCTION:	Cement
SD	LINING:	Heavy Duty Nylex
NM	INSOLE:	Removable Polyurethane "Ultimate® SD" Footbed
SR	MIDSOLE:	Compression Molded EVA with Impact 300 Gel Heel Insert
	SHANK:	Engineered Composite
	OUTSOLE:	VGS 300 Traction Rubber
	SPECIAL FEATURES:	100% Non-Metallic. ASTM F2413-11 M I/75/C/75 Composite Safety Toe. Static Dissipative, Meets ASTM 2412-11 Test Requirements.

MEN'S SIZES

M 4-12, 13, 14
W 4-12, 13, 14



SOLE 33



REPLACEMENT FOOTBED 889-6017



804-4061

► SD SLIP-ON COMPOSITE SAFETY TOE



75	UPPER:	Brown Full Grain Leather
	CONSTRUCTION:	Cement
SD	LINING:	Moisture Wicking Comfort Weave
NM	INSOLE:	Full Length Removable Polyurethane Footbed
SR	MIDSOLE:	Compression Molded EVA with Impact 300 Gel Heel Insert
	SHANK:	Engineered Composite
	OUTSOLE:	A.S.R. Super Slip Resisting Rubber
	SPECIAL FEATURES:	100% Non-Metallic. ASTM F2413-11 M I/75/C/75 Composite Safety Toe. Static Dissipative. Meets ASTM 2412-11 Test Requirements.

MEN'S SIZES

M 4-12, 13, 14
W 6-12, 13, 14



SOLE 19



REPLACEMENT FOOTBED 889-6017





804-4091

► VGS EH SPORT OXFORD COMPOSITE SAFETY TOE

75	UPPER:	Brown Nubuck
	CONSTRUCTION:	Cement
EH	LINING:	Heavy Duty Nylex
NM	INSOLE:	Removable "VGS Motion Sensor" Dual Density Polyurethane Footbed with Memory Foam
SR	MIDSOLE:	Compression Molded EVA with Impact 300 Gel Heel Insert
	SHANK:	Engineered Composite
	OUTSOLE:	VGS 300 Traction Rubber
	SPECIAL FEATURES:	100% Non-Metallic. ASTM F2413-11 M I/75/C/75 COMPOSITE SAFETY TOE. EH Rated. Tested For and Meets CAN/CSA-Z195 18,000 Volts Electric Shock Resistance. Molded Rubber Heel and Ankle Stabilizer.

MEN'S SIZES

M 4-12, 13, 14
W 7-12, 13, 14



SOLE 27



REPLACEMENT FOOTBED 889-6009



804-4092

► VGS EH SPORT HIKER COMPOSITE SAFETY TOE

75	UPPER:	Brown Nubuck
	CONSTRUCTION:	Cement
EH	LINING:	Heavy Duty Nylex
NM	INSOLE:	Removable "VGS Motion Sensor" Dual Density Polyurethane Footbed with Memory Foam
SR	MIDSOLE:	Compression Molded EVA with Impact 300 Gel Heel Insert
	SHANK:	Engineered Composite
	OUTSOLE:	VGS 300 Traction Rubber
	SPECIAL FEATURES:	100% Non-Metallic. ASTM F2413-11 M I/75/C/75 COMPOSITE SAFETY TOE. EH Rated. Tested For and Meets CAN/CSA-Z195 18,000 Volts Electric Shock Resistance. Molded Rubber Heel and Ankle Stabilizer.

MEN'S SIZES

M 4-12, 13, 14
W 7-12, 13, 14



SOLE 27



REPLACEMENT FOOTBED 889-6009



804-4095

► VGS EH WATERPROOF SPORT HIKER COMPOSITE SAFETY TOE

75	UPPER:	Brown WATERPROOF Tumbled Full Grain Leather
EH	CONSTRUCTION:	Cement
	LINING:	Heavy Duty Nylex
NM	INSOLE:	Removable "VGS Motion Sensor" Dual Density Polyurethane Footbed with Memory Foam
SR	MIDSOLE:	Compression Molded EVA with Impact 300 Gel Heel Insert
WP	SHANK:	Engineered Composite
	OUTSOLE:	VGS 300 Traction Rubber
	SPECIAL FEATURES:	Thoro-dri™ WATERPROOF System. ASTM F2413-11 M I/75/C/75 Composite Safety Toe. EH Rated. Tested For and Meets CAN/CSA-Z195 18,000 Volts Electric Shock Resistance Standard. Molded Rubber Heel Stabilizer.

MEN'S SIZES

M 4-12, 13, 14
W 7-12, 13, 14



SOLE 33



REPLACEMENT FOOTBED 889-6009



Thoro-dri™

▲ For Women's size order Men's size above it (i.e.: Women's 6, order Men's 4, etc.). Women's Medium = Men's B Width, Women's Wide = Men's D Width

Men's	3	3½	4	4½	5	5½	6	6½	7	7½	8	8½	9	9½	10	10½	11	11½	12	13	14	15
Women's	5	5½	6	6½	7	7½	8	8½	9	9½	10	10½	11	11½	12							



804-4900

▶ 6" WATERPROOF HIKER WITH **OBLIQUE COMPOSITE SAFETY TOE**

75	UPPER:	Brown WATERPROOF Tumbled Full Grain Leather
EH	CONSTRUCTION:	Direct Injection
NM	LINING:	Cosmo Aeraspacer®
SR	INSOLE:	Full Length Removable Dual Density Polyurethane "SHOCK ZONE" Footbed with Air Flow Vents
WP	MIDSOLE:	Polyurethane
	SHANK:	Engineered Composite
	OUTSOLE:	Durable Rubber Sole with 90° Heel
	SPECIAL FEATURES:	ASTM F2413-11 M I/75/C/75 Composite Oblique Safety Toe . EH Rated. Tested For and Meets CAN/CSA-Z195 18,000 Volts Electric Shock Resistance Standard. Thoro>dri™ WATERPROOF System.

MEN'S SIZES

M 4-12, 13, 14, 15
W 4-12, 13, 14, 15



SOLE 34



REPLACEMENT FOOTBED
889-8000



Thoro>dri™

MEN'S SIZES

M 4-12, 13, 14
W 6½-12, 13, 14

814-4900

▶ 6" WATERPROOF HIKER NON-SAFETY

SR WP

804-6037

▶ 6" WATERPROOF HIKER WITH **OBLIQUE COMPOSITE SAFETY TOE**

75	UPPER:	Black WATERPROOF Full Grain Leather
EH	CONSTRUCTION:	Direct Injection
NM	LINING:	Spacer® Mesh Nylon
SR	INSOLE:	Full Length Removable Dual Density Polyurethane "SHOCK ZONE" Footbed with Air Flow Vents
WP	MIDSOLE:	Polyurethane
PR	SHANK:	Engineered Composite
	OUTSOLE:	Durable Rubber Sole with 90° Heel
	SPECIAL FEATURES:	TOTALLY Non-Metallic . Flexible L-Protection™ Puncture-Resisting Insole Material. ASTM F2413-11 M I/75/C/75 Composite Oblique Safety Toe . EH Rated. Tested For and Meets CAN/CSA-Z195 18,000 Volts Electric Shock Resistance Standard. Thoro>dri™ WATERPROOF System.

MEN'S SIZES

M 4-12, 13, 14
W 4-12, 13, 14



SOLE 34



REPLACEMENT FOOTBED
889-8000



Thoro>dri™
L-protection
LENZI



804-4908

▶ 8" WATERPROOF WITH **OBLIQUE COMPOSITE SAFETY TOE**

75	UPPER:	Brown WATERPROOF Tumbled Full Grain Leather
EH	CONSTRUCTION:	Direct Injection
NM	LINING:	Cosmo Aeraspacer®
SR	INSOLE:	Full Length Removable Dual Density Polyurethane "SHOCK ZONE" Footbed with Air Flow Vents
WP	MIDSOLE:	Polyurethane
	SHANK:	Engineered Composite
	OUTSOLE:	Durable Rubber Sole with 90° Heel
	SPECIAL FEATURES:	ASTM F2413-11 M I/75/C/75 Composite Oblique Safety Toe . EH Rated. Tested For and Meets CAN/CSA-Z195 18,000 Volts Electric Shock Resistance Standard. Thoro>dri™ WATERPROOF System.

MEN'S SIZES

M 4-12, 13, 14
W 4-12, 13, 14



SOLE 34



REPLACEMENT FOOTBED
889-8000



Thoro>dri™



804-4910

▶ WATERPROOF WELLINGTON **OBLIQUE COMPOSITE SAFETY TOE**

75	UPPER:	Brown WATERPROOF Tumbled Full Grain Leather
EH	CONSTRUCTION:	Direct Injection
NM	LINING:	Cosmo Aeraspacer®
SR	INSOLE:	Full Length Removable Dual Density Polyurethane "SHOCK ZONE" Footbed with Air Flow Vents
WP	MIDSOLE:	Polyurethane
	SHANK:	Engineered Composite
	OUTSOLE:	Durable Rubber Sole with 90° Heel
	SPECIAL FEATURES:	ASTM F2413-11 M I/75/C/75 Composite Oblique Safety Toe . EH Rated. Tested For and Meets CAN/CSA-Z195 18,000 Volts Electric Shock Resistance Standard. Thoro>dri™ WATERPROOF System.

MEN'S SIZES

M 4-12, 13, 14, 15
W 8-12, 13, 14, 15



SOLE 34



REPLACEMENT FOOTBED
889-8000



Thoro>dri™





804-4095

▶ VGS EH WATERPROOF SPORT HIKER COMPOSITE SAFETY TOE

75	UPPER:	Brown WATERPROOF Tumbled Full Grain Leather
EH	CONSTRUCTION:	Cement
NM	LINING:	Heavy Duty Nylex
SR	INSOLE:	Removable "VGS Motion Sensor" Dual Density Polyurethane Footbed with Memory Foam
WP	MIDSOLE:	Compression Molded EVA with Impact 300 Gel Heel Insert
	SHANK:	Engineered Composite
	OUTSOLE:	VGS 300 Traction Rubber
	SPECIAL FEATURES:	Thoro>dri™ WATERPROOF System. ASTM F2413-11 M I/75/C/75 Composite Safety Toe . EH Rated. Tested For and Meets CAN/CSA-Z195 18,000 Volts Electric Shock Resistance Standard . Molded Rubber Heel Stabilizer.

MEN'S SIZES

M	4-12, 13, 14
W	7-12, 13, 14



SOLE 33



REPLACEMENT FOOTBED
889-6009



Thoro>dri™



804-4800

▶ 6" WATERPROOF SPORT HIKER SAFETY TOE

75	UPPER:	Brown Oiled Nubuck
EH	CONSTRUCTION:	Cement
SR	LINING:	Two Zone Wicking Mesh
WP	INSOLE:	Full Length Removable Polyurethane Footbed
	MIDSOLE:	Super Light EVA
	SHANK:	Engineered Composite
	OUTSOLE:	XLS Rubber with S.T.E.P. Technology
	SPECIAL FEATURES:	Thoro>dri™ WATERPROOF System. ASTM F2413-11 M I/75/C/75 Steel Toe . EH Rated. Tested For and Meets CAN/CSA-Z195 18,000 Volts Electric Shock Resistance Standard .

MEN'S SIZES

M	4-12, 13, 14, 15
W	7-12, 13, 14, 15



SOLE 24



Thoro>dri™

▲ For Women's size order Men's size above it (i.e.: Women's 6, order Men's 4, etc.). Women's Medium = Men's B Width, Women's Wide = Men's D Width

Men's	3	3½	4	4½	5	5½	6	6½	7	7½	8	8½	9	9½	10	10½	11	11½	12	13	14	15	
Women's	5	5½	6	6½	7	7½	8	8½	9	9½	10	10½	11	11½	12								



804-4650

▶ 6" BROWN LACE-TO-TOE SEMI-OBLIQUE SAFETY TOE

75	UPPER:	Brown Oiled Nubuck Leather
	CONSTRUCTION:	Goodyear Storm Welt
EH	LINING:	Brushed Nylon
	INSOLE:	Wrapped Cushion
SR	MIDSOLE:	Rubber
	SHANK:	Steel
	OUTSOLE:	Oil-Resisting EVA Lug
	SPECIAL FEATURES:	ASTM F2413-11 M I/75/C/75 Steel Toe. EH Rated. Tested For and Meets CAN/CSA-Z195 18,000 Volts Electric Shock Resistance Standard.

MEN'S SIZES

M 4-12, 13, 14, 15
W 4-12, 13, 14, 15



SOLE 30



804-6450

▶ 6" BLACK LACE-TO-TOE SEMI-OBLIQUE SAFETY TOE

75	UPPER:	Black Oiled Nubuck Leather
	CONSTRUCTION:	Goodyear Storm Welt
EH	LINING:	Brushed Nylon
	INSOLE:	Wrapped Cushion
SR	MIDSOLE:	Rubber
	SHANK:	Steel
	OUTSOLE:	Oil-Resisting EVA Lug
	SPECIAL FEATURES:	ASTM F2413-11 M I/75/C/75 Steel Toe. EH Rated. Tested For and Meets CAN/CSA-Z195 18,000 Volts Electric Shock Resistance Standard.

MEN'S SIZES

M 5-12, 13, 14, 15
W 7-12, 13, 14, 15



SOLE 30



804-4612

▶ 6" SPORT BOOT SEMI-OBLIQUE COMPOSITE SAFETY TOE

75	UPPER:	Tobacco Oil-Tanned Full Grain Leather
	CONSTRUCTION:	Goodyear Storm Welt
EH	INSOLE:	Full Length Removable Polyurethane Footbed
	MIDSOLE:	Rubber
SR	SHANK:	Steel
PR	OUTSOLE:	Oil and Slip Resisting Rubber Chevron
	SPECIAL FEATURES:	Flexible Puncture-Resisting Insole Material. ASTM F2413-11 M I/75/C/75. Composite Oblique Safety Toe. EH Rated. Tested For and Meets CAN/CSA-Z195 18,000 Volts Electric Shock Resistance Standard.

MEN'S SIZES

M 7-12, 13, 14, 15
W 7-12, 13, 14, 15

SOLE 22



▲ For Women's size order Men's size above it (i.e.: Women's 6, order Men's 4, etc.). Women's Medium = Men's B Width, Women's Wide = Men's D Width

Men's	3	3½	4	4½	5	5½	6	6½	7	7½	8	8½	9	9½	10	10½	11	11½	12	13	14	15
Women's	5	5½	6	6½	7	7½	8	8½	9	9½	10	10½	11	11½	12							



804-3556

► 8" WATERPROOF LOGGER OBLIQUE COMPOSITE SAFETY TOE

75	UPPER:	Brown Trail Crazyhorse Oil-Tanned Leather
	CONSTRUCTION:	Goodyear Leather Welt
EH	LINING:	Comfort Weave
SR	INSOLE:	Removable Full Length Polyurethane Footbed
	MIDSOLE:	Rubber
WP	SHANK:	Steel Triple Ladder Shank
	OUTSOLE:	Oil and Slip Resisting Logger
SPECIAL FEATURES: ASTM F2413-11 M I/75/C/75 Oblique Composite Safety Toe . "Triple Stitched" Vamp. Solid "Antique Brass" Hardware. Security "Tip Stitch" on Outsole. Removable Kiltie. EH Rated. Tested For and Meets CAN/CSA-Z195 18,000 Volts Electric Shock Resistance Standard . Thoro>dri™ Membrane WATERPROOF System.		

MEN'S SIZES

M 8-12, 13, 14
W 8-12, 13, 14

SOLE 25



Thoro>dri™



804-4611

► WELLINGTON SEMI-OBLIQUE SAFETY TOE

75	UPPER:	Tobacco Oil-Tanned Full Grain Leather
	CONSTRUCTION:	Goodyear Storm Welt
EH	INSOLE:	Removable Dual Density Polyurethane Footbed
SR	MIDSOLE:	Rubber
	SHANK:	Steel
	OUTSOLE:	Oil and Slip Resisting Rubber Chevron
SPECIAL FEATURES: ASTM F2413-11 M I/75/C/75 Steel Toe. EH Rated. Tested For and Meets CAN/CSA-Z195 18,000 Volts Electric Shock Resistance Standard .		

MEN'S SIZES

M 7-12, 13, 14, 15
W 7-12, 13, 14, 15

SOLE 22



I-MET METATARSAL GUARD

PATENTED TECHNOLOGY



804-4132

► 8" SIDE ZIP WELLINGTON I-MET

75	UPPER:	Dark Brown Regal Soggy Leather
	CONSTRUCTION:	Goodyear Storm Welt
MT	LINING:	Two Zone Wicking Mesh
I-M	INSOLE:	Removable Dual Density Ultimate Shock Absorption™ Footbed
EH	MIDSOLE:	Rubber
SR	SHANK:	Engineered Composite
	OUTSOLE:	HEAT RESISTING Vibram® #582K Sole with 90° Heel
SPECIAL FEATURES: ASTM F2413-11 M I/75/C/75/M/75 Steel Toe. EH Rated. Patented I-MET Technology. Tested For and Meets CAN/CSA-Z195 18,000 Volts Electric Shock Resistance Standard . Kevlar® Stitching on Upper. Kevlar® Goodyear Welt Stitching. Reinforce Stitch "Ball to Ball" on Outsole.		

MEN'S SIZES

M 7-12, 13, 14
W 7-12, 13, 14

SOLE 10



REPLACEMENT FOOTBED 889-6007



804-4848

► 8" SUPER I-MET

75	UPPER:	Brown Full Grain Oil-Tanned Leather
	CONSTRUCTION:	Goodyear Storm Welt
MT	INSULATION:	<i>B-200 Thinsulate™ Insulation</i>
I-M	LINING:	Two Zone Wicking Mesh
EH	INSOLE:	Removable Dual Density Ultimate Shock Absorption™ Footbed
SR	MIDSOLE:	Rubber
	SHANK:	Engineered Composite
WP	OUTSOLE:	HEAT RESISTING Vibram® Technical Lug Rubber Sole with 90° Heel
SPECIAL FEATURES: ASTM F2413-11 M I/75/C/75/M/75 Steel Toe. EH Rated. Patented I-MET Technology. Tested For and Meets CAN/CSA-Z195 18,000 Volts Electric Shock Resistance Standard . Thoro>dri™ WATERPROOF System, Abrasion Resisting Rubber Toe, Heel and Sidewall Bumper. Kevlar® Stitching on Upper. Kevlar® Goodyear Welt Stitching. Reinforce Stitch "Ball to Ball" on Outsole.		

MEN'S SIZES

M 8-12, 13, 14
W 8-12, 13, 14

SOLE 8



REPLACEMENT FOOTBED 889-6007



Thoro>dri™



804-4320

► SLIP-ON COMPOSITE SAFETY TOE I-MET²

75	UPPER:	Brown Full Grain Leather
MT	CONSTRUCTION:	Cement
I-M ²	LINING:	Moisture Wicking Comfort Weave
EH	INSOLE:	Full Length Removable Polyurethane Footbed
NM	MIDSOLE:	Compression Molded EVA with Impact 300 Gel Heel Insert
SR	SHANK:	Engineered Composite
	OUTSOLE:	A.S.R. Super Slip Resisting Rubber
	SPECIAL FEATURES:	100% Non-Metallic. ASTM F2413-11 M I/75/C/75/M/75 Composite Safety Toe. EH Rated. Tested For and Meets CAN/CSA-Z195 18,000 Volts Electric Shock Resistance Standard. Patented I-MET ² Technology.

MEN'S SIZES

M	4-12, 13, 14
W	6-12, 13, 14

SOLE 19



804-4312 MEN'S | 504-4312 WOMEN'S

► HIKER I-MET

75	UPPER:	Dark Brown Tumbled Full Grain Leather with Black Suede Leather Inserts and Napa Leather Collar
MT	CONSTRUCTION:	Direct Injection
I-M	LINING:	Two Zone Wicking Mesh
EH	INSOLE:	Removable Dual Density Polyurethane "SHOCK ZONE" Footbed with Air Flow Vents
SR	MIDSOLE:	Compression Molded Polyurethane
	SHANK:	Engineered Composite
	OUTSOLE:	Durable Rubber Sole with 90° Heel
	SPECIAL FEATURES:	ASTM F2413-11 M I/75/C/75/M/75 Steel Toe. EH Rated. Patented I-MET Technology. Tested For and Meets CAN/CSA-Z195 18,000 Volts Electric Shock Resistance Standard.

MEN'S SIZES

M	7-12, 13, 14, 15
W	7-12, 13, 14, 15

WOMEN'S SIZES

M	6-10, 11
W	6-10, 11

SOLE 29



REPLACEMENT FOOTBED 889-8000



804-4614

► 6" LACE-TO-TOE I-MET

75	UPPER:	Tobacco Oil-Tanned Full Grain Leather
MT	CONSTRUCTION:	Goodyear Storm Welt
I-M	LINING:	Two Zone Wicking Mesh
EH	INSOLE:	Removable Full Length Polyurethane Footbed on Poron® 4000 Comfort Cushion
SR	MIDSOLE:	Rubber
	SHANK:	Steel
	OUTSOLE:	Oil and Slip Resisting Rubber Chevron
	SPECIAL FEATURES:	Patented I-MET Technology. ASTM F2413-11 M I/75/C/75/M/75 Steel Toe. EH Rated. Tested For and Meets CAN/CSA-Z195 18,000 Volts Electric Shock Resistance Standard.

MEN'S SIZES

M	8-12, 13, 14
W	8-12, 13, 14

SOLE 22





WORK FOOTWEAR

WEINBRENNERUSA.COM • ISO 9001 CERTIFIED



An Employee Owned Company



Dear Friends,

“Only Made in USA.” WORK ONE® is very proud to make this statement. Not many brands can. Over 98% of the footwear consumed in this country today is not made here.

Weinbrenner Shoe Co. has been manufacturing footwear in the USA since 1892, that’s over 120 years. We are committed to be doing so in 2092 and beyond.

Our dedicated factory workers have been union affiliated since 1943. They proudly craft the most technically advanced safety footwear available today. They also produce shoes for our armed forces, fire fighters, law enforcement professionals, and for members of the United States Postal Workers Union.

We are proud to present to you our 2012 WORK ONE® collection. You can rest assured that every pair meets the rigid safety requirements of the American Standard Test Method, produced in an ISO 9001 quality environment.

Thank you for allowing us to supply your protective footwear needs.

Sincerely,

Richard M. DiFalco
SENIOR VICE PRESIDENT OF SALES AND MARKETING

Dear Fellow Brothers and Sisters,

Our Local Union is proud to be a part of the Weinbrenner Shoe Co. since 1943. At that time we were an affiliate of the International Boot and Shoe Workers Union. We are now known as Locals #688 and #717 of the United Food & Commercial Workers International Union, AFL-CIO, CLC.

In these fast-changing times, we have adapted with our union structure, we have improved the manufacturing process, we have maintained excellent labor-management relationships, and we continue to meet the safety footwear wants and needs of our valued customers.

As a result of these efforts and your support of this WORK ONE® line, our nation can keep vital manufacturing jobs here, and our union members can maintain their family livelihoods with steady work, good wages, and benefits.

Thank you for allowing us to provide you with WORK ONE® footwear, made with pride by fellow skilled American craftsmen.

Sincerely,

Ted Baumann
PRESIDENT OF UFCW LOCAL #688

PRODUCT CHANGE NOTICE

This Thorogood catalog is accurate as of the date of printing. However, in our never ending pursuit of better materials and construction there may be product specification changes made during the year without notice. The Thorogood price list is your official list of stock numbers available.

YOUR ASSURANCE OF QUALITY

For over 120 years Weinbrenner Shoe Company has built a tradition of quality and a reputation for value, innovation, and craftsmanship. Our customers are provided footwear products that are functional, responsive to their needs, and of the highest quality, reflecting the talents of the finest craftsmen.

Our company management / employee owners are committed to these ideals and the resources necessary to maintain them. Employees strive to satisfy customer needs by offering quality workmanship and the most responsive service in the footwear industry.

To further demonstrate its commitment, Weinbrenner has implemented a Quality Management System which conforms to the requirements of the International Standard ISO 9001.

Weinbrenner is an ISO 9001 Certified Shoe Company

108 S. Polk Street · Merrill, WI 54452 · 1-800-826-0002
WWW.WEINBRENNERUSA.COM

MEN'S WORK ONE

Stock Number	PAGE
38253	33
E068	36
E069	36
E078	34
E098	35
E308	36
E608	35
I700	32
I702	32
I703	33
I707	35

MEN'S WORK ONE

Stock Number	PAGE
S001	30
S060	31
S061	31
S080	31

WOMEN'S WORK ONE

Stock Number	PAGE
8708	37
E078	37
I700	37
I702	37
S060	37

ORDER NOW



EMAIL ORDERS
csd@weinbrennerusa.com



WEB SITE ORDERS
DEALERS ONLY
www.weinbrennerusa.com / dealer
Login or create your account here



FAX ORDERS
800-569-6817



PHONE ORDERS
800-826-0002

To make your selection easier, we have included symbols that call your attention to important features built into the shoes throughout this catalog. Tested and certified to meet the rigid standards established by the American Standard Test Method (ASTM), all of our Safety Footwear meets or exceeds the highest ASTM F2413-11 ratings for impact, compression, and metatarsal.



MADE IN THE USA
UNION MADE



USA FEATURE SHOE indicates that this is a "Top Selling" style within a product category. It is our intention to maintain a large inventory on each of these styles for immediate delivery. Shoes that do not carry this icon, will be backed by normal inventory quantities, based on sales history.

75

IMPACT: Class I/75 footwear retains a .500 inch (1/2 inch) for men's and .468 inch (15/32 inch) for women's or greater clearance after a nominal impact of 75 foot-pounds (101.7J), i.e., a 50 pound weight dropped from 18 inches reaching 117.9 ± 2.4 inches per second velocity at impact. **COMPRESSION:** Class C/75 footwear retains a .500 inch (1/2 inch) after compression of 2500 lbs. (11,121 N) or greater. Meets ASTM F2413-11 M I/75/C/75 ratings.

EH

ELECTRIC HAZARD Resistant Footwear (EH): Constructed or manufactured with electric shock resisting soles and heels capable of withstanding an application of 18,000 volts (root mean square (RMS) value) at 60 Hz for 1 minute with no current flow or leakage current in excess of 3.0 milliamperes under dry conditions. **Tested for and meets CAN/CSA-Z195 ELECTRIC SHOCK RESISTANCE.**

SD

STATIC DISSIPATIVE: SD footwear will provide for a resistance of between 106 (1 meg ohm) and 108 (100 meg ohms) resistance when 50 volts are applied via an electrode to the hand of a person wearing the SD test sample on a conductive ground plate. SD Footwear meets ASTM 2412-11 test requirements.

MT

METATARSAL: Class ASTM F2413-11 Mt/75 footwear retains a 1.0 inch clearance for men's and 15/16 inch clearance for women's, after a nominal impact of 75 foot-pounds (101.7J), i.e., a 50 lb. weight dropped from 18 inches reaching 117.9 ± 2.4 inches per second velocity at impact 3.5 inches in from the toe of the footwear (3.375 inches on women's).

I-M

I-MET Patented Technology: A breakthrough in metatarsal protection, exclusively from Thorogood features the only internal, invisible, Metatarsal Guard that's completely integrated with the safety toe cap.

I-M²

I-MET² Patented Technology: Exclusively from Thorogood Shoes & Work One Footwear. The polymer compound used in the I-MET² absorbs and deflects impact to the instep of the foot. Like the original I-MET, I-MET² is an internal, invisible, Metatarsal Guard that's completely integrated with the protective toe cap.

NM

NON-METALLIC UPPER: These styles are 100% non-metallic utilizing Composite Toes and non-metallic hardware (eyelets). These features will help minimize the chance of marking/scratching work surfaces and will Not Activate security screening devices.

SR


SLIP RESISTING: Footwear meets or exceeds the ASTM F2913-11 SATRA Test Method TM144 Standard for slip resistance.

WORK ONE®, SUPERLEATHER®, I-MET²®, POLY-PILLOW FOOTPACER™, ULTIMATE SHOCK ABSORPTION™. I-MET® are registered trademarks of the Weinbrenner Shoe Company, Inc.

VIBRAM® and the Yellow Octagonal Label are registered trademark of Vibram S.p.A. of Italy Quabaug Corporation, North Brookfield, MA, is the North American manufacturer of Vibram soling products under exclusive license. SYMPATEX® is a registered trademark of Sympatex Technologies GmbH. THINSULATE™ is a trademark of 3M. PORON® is a registered trademark of Rogers Corporation. KEVLAR® is a registered trademark of Invista.



CLASSIC GREEN STRIPE

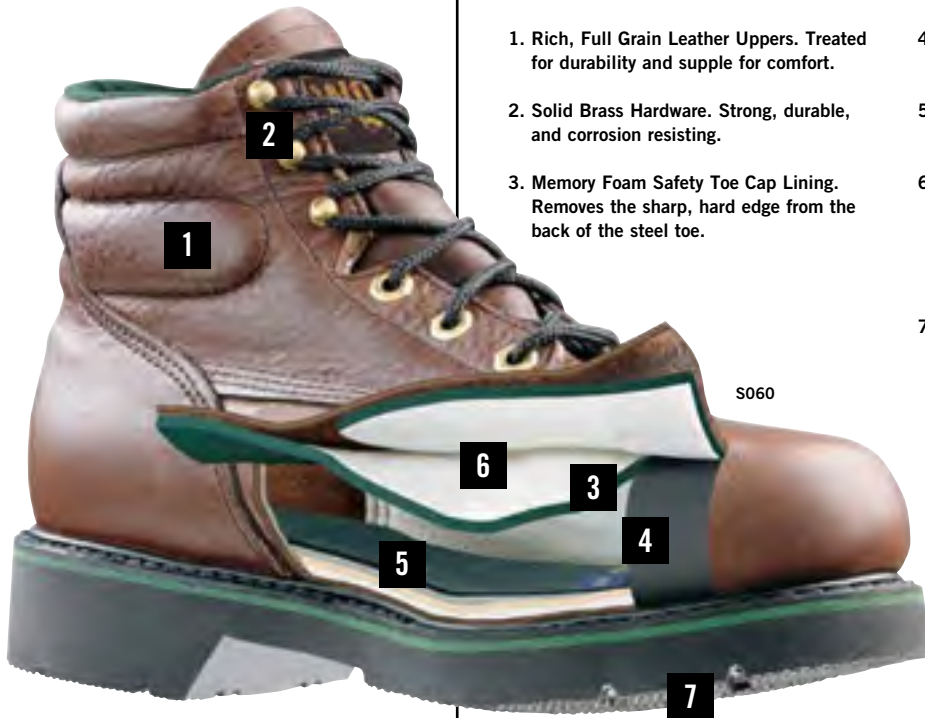

1. Rich, Full Grain Leather Uppers. Treated for durability and supple for comfort.
2. Solid Brass Hardware. Strong, durable, and corrosion resisting.
3. Memory Foam Safety Toe Cap Lining. Removes the sharp, hard edge from the back of the steel toe.

4. Oversized Safety Toe. Allows plenty of area for toes to spread, bend, and flex.
5. Removable Polyurethane "Ultimate" SD Footbed.
6. Comfort Weave Linings. Absorption Zone helps remove perspiration from the foot. Transport Zone helps moisture evaporate through the upper leather. Keeps feet cool, dry, and comfortable.

7. Work One® Dual Density Sole and Heel Unit. Outer density is abrasion and slip resisting. Inner density provides a soft bed of shock absorbing comfort. Both densities are oil, chemical, and acid resisting. Sole comes in either electrical hazard or static dissipative versions.

WEINBRENNER IS AN ISO 9001 CERTIFIED COMPANY

S001

MOC TOE OXFORD SAFETY TOE

	UPPER:	Black Walnut Full Grain Oil-Tanned Leather
	CONSTRUCTION:	Goodyear Storm Welt
75	LINING:	Forest Green Dri-Lex®
SD	INSOLE:	Removable Polyurethane "Ultimate" SD Footbed
SR	MIDSOLE:	Rubber Green Stripe
	SHANK:	Engineered Composite
	OUTSOLE:	Work One® Dual Density Polyurethane Comfort Sole With 90° Heel
	SPECIAL FEATURES:	ASTM F2413-11 M I/75/C/75 Steel Toe. Static Dissipative, Meets ASTM 2412-11 Test Requirements. Reinforce Stitch "Ball to Ball" on Outsole.

MEN'S SIZES

D 8-12, 13
E 8-12, 13
EEE 8-12, 13

SOLE 21



REPLACEMENT FOOTBED
889-6017





S060

► 6" SPORT BOOT SAFETY TOE

	UPPER:	Black Walnut Full Grain Oil-Tanned Leather
	CONSTRUCTION:	Goodyear Storm Welt
75	LINING:	Forest Green Dri-Lex®
SD	INSOLE:	Removable Polyurethane "Ultimate® SD" Footbed
SR	MIDSOLE:	Rubber Green Stripe
	SHANK:	Engineered Composite
	OUTSOLE:	Work One® Dual Density Polyurethane Comfort Sole With 90° Heel
	SPECIAL FEATURES:	ASTM F2413-11 M I/75/C/75 Steel Toe. Static Dissipative, Meets ASTM 2412-11 Test Requirements. Reinforce Stitch "Ball to Ball" on Outsole.

MEN'S SIZES

A	9-11, 12
B	4-12, 13
C	9-12, 13
D	4-12, 13, 14, 15, 16, 17, 18
E	6-12, 13, 14, 15, 16, 17, 18
EEE	6-12, 13, 14, 15, 16, 17, 18

SOLE 21



REPLACEMENT FOOTBED
889-6017



S061

► 6" SPORT BOOT SAFETY TOE

	UPPER:	Black Full Grain Oil-Tanned Leather
	CONSTRUCTION:	Goodyear Storm Welt
75	LINING:	Forest Green Dri-Lex®
SD	INSOLE:	Removable Polyurethane "Ultimate® SD" Footbed
SR	MIDSOLE:	Rubber Green Stripe
	SHANK:	Engineered Composite
	OUTSOLE:	Work One® Dual Density Polyurethane Comfort Sole with 90° Heel
	SPECIAL FEATURES:	ASTM F2413-11 M I/75/C/75 Steel Toe. Static Dissipative, Meets ASTM 2412-11 Test Requirements. Reinforce Stitch "Ball to Ball" on Outsole.

MEN'S SIZES

D	7-12, 13
E	8-12, 13
EEE	8-12, 13

SOLE 21



REPLACEMENT FOOTBED
889-6017



S080

► 8" SPORT BOOT SAFETY TOE

	UPPER:	Black Walnut Full Grain Oil-Tanned Leather
	CONSTRUCTION:	Goodyear Storm Welt
75	LINING:	Forest Green Dri-Lex®
SD	INSOLE:	Removable Polyurethane "Ultimate® SD" Footbed
SR	MIDSOLE:	Rubber Green Stripe
	SHANK:	Engineered Composite
	OUTSOLE:	Work One® Dual Density Polyurethane Comfort Sole with 90° Heel
	SPECIAL FEATURES:	ASTM F2413-11 M I/75/C/75 Steel Toe. Static Dissipative, Meets ASTM 2412-11 Test Requirements. Reinforce Stitch "Ball to Ball" on Outsole.

MEN'S SIZES

B	9-12, 13
D	7-12, 13, 14
E	8-12, 13, 14
EEE	8-12, 13

SOLE 21



REPLACEMENT FOOTBED
889-6017





I-MET METATARSAL GUARD

PATENTED TECHNOLOGY

A breakthrough in metatarsal protection, I-MET® exclusively from THOROGOOD®, features the only Internal Metatarsal Guard that's completely integrated with the steel toe cap.

1. Memory Foam Padding helps absorb the impact to the foot and instep
2. Flexible **I-MET**
3. Steel Toe ASTM F2413-11 M I/75/C/75/Mt/75

Integrated: Permanently “locks” the metatarsal into place to prevent “rolling/ floating” of the MetGuard.

Internal: Eliminates the potential “trip hazard” which is common with some conventional metatarsals.

Invisible: Invisible from the outside, this flexible Met provides all day protection and comfort.

I703

I 700

▶ 6" I-MET

	UPPER:	Black Full Grain Oil-Tanned Leather
	CONSTRUCTION:	Goodyear Storm Welt
75	LINING:	Forest Green Dri-Lex®
MT	INSOLE:	Removable Polyurethane Footbed on Top of a Poron® 4000 Comfort Cushion
I-M	MIDSOLE:	Rubber Green Stripe
EH	SHANK:	Engineered Composite
SR	OUTSOLE:	Work One® Dual Density Polyurethane Comfort Sole with 90° Heel
	SPECIAL FEATURES:	ASTM F2413-11 M I/75/C/75/Mt/75 Steel Toe, EH Rated. Tested For and Meets CAN/CSA-Z195 18,000 Volts Electric Shock Resistance Standard . Patented I-MET Technology. Reinforce Stitch “Ball to Ball” on Outsole.

MEN'S SIZES

D 4-12, 13, 14, 15
EEE 8-12, 13, 14, 15

SOLE 21



I 702

▶ 6" I-MET

	UPPER:	Black Walnut Full Grain Oil-Tanned Leather
	CONSTRUCTION:	Goodyear Storm Welt
75	LINING:	Forest Green Dri-Lex®
MT	INSOLE:	Removable Polyurethane Footbed on Top of a Poron® 4000 Comfort Cushion
I-M	MIDSOLE:	Rubber
EH	SHANK:	Engineered Composite
SR	OUTSOLE:	HEAT RESISTING Vibram® ALPHA+ Sole
	SPECIAL FEATURES:	ASTM F2413-11 M I/75/C/75/Mt/75 Steel Toe, EH Rated. Tested For and Meets CAN/CSA-Z195 18,000 Volts Electric Shock Resistance Standard . Patented I-MET Technology. Reinforce Stitch “Ball to Ball” on Outsole.

MEN'S SIZES

D 4-12, 13, 14, 15
EEE 8-12, 13, 14, 15

SOLE 5



MADE IN




THE USA



38253

► 8" I-MET

	UPPER:	Brown Full Grain Oil-Tanned Leather
	CONSTRUCTION:	Goodyear Storm Welt
75	LINING:	Forest Green Dri-Lex®
MT	INSOLE:	Removable Polyurethane Footbed
	MIDSOLE:	Rubber
I-M	SHANK:	Engineered Composite
	OUTSOLE:	HEAT RESISTING Vibram® ALPHA+ Sole
EH	SPECIAL FEATURES:	ASTM F2413-11 M I/75/C/75/M/75 Steel Toe, EH Rated. Tested For and Meets CAN/CSA-Z195 18,000 Volts Electric Shock Resistance Standard. Patented I-MET Technology. Reinforce Stitch "Ball to Ball" on Outsole.
SR		

MEN'S SIZES


D 4-12, 13, 14, 15
 EEE 8-12, 13, 14, 15

SOLE 5



I 703

► 8" I-MET

	UPPER:	Brown Full Grain Oil-Tanned Leather
	CONSTRUCTION:	Goodyear Storm Welt
75	LINING:	Forest Green Dri-Lex®
MT	INSOLE:	Removable Polyurethane Footbed on Top of a Poron® 4000 Comfort Cushion
I-M	MIDSOLE:	Rubber Green Stripe
	SHANK:	Engineered Composite
EH	OUTSOLE:	Work One® Dual Density Polyurethane Comfort Sole with 90° Heel
SR	SPECIAL FEATURES:	ASTM F2413-11 M I/75/C/75/M/75 Steel Toe, EH Rated. Tested For and Meets CAN/CSA-Z195 18,000 Volts Electric Shock Resistance Standard. Patented I-MET Technology. Reinforce Stitch "Ball to Ball" on Outsole.

MEN'S SIZES

D 8-12, 13, 14, 15
 EEE 9-12, 13, 14, 15

SOLE 21



I-MET²

METATARSAL GUARD

PATENTED TECHNOLOGY



I-MET²® is a revolutionary concept in internal metatarsal protection.

The polymer compound used in the I-MET²® absorbs and deflects impact to the instep of the foot. Like the original I-MET, I-MET²® is an internal, invisible, Metatarsal Guard that's completely integrated with the protective toe cap.

- 1 Oil Tanned "Full Grain" Leather Uppers
- 2 Patented Flexible I-MET² Technology
- 3 Oversized Safety Toe
- 4 Full Length Removable Polyurethane Insole
- 5 Full Length "Lasted In" Poron 4000 Insole
- 6 Insole System with "Easy Flex" Notches
- 7 Goodyear Storm Welt Construction
- 8 Green Rubber Midsole
- 9 Polyurethane "Shock Absorbing" Midsole
- 10 Work One Polyurethane "Comfort Sole" with 90° Heel
- 11 Outsole is Security Stitched "Ball to Ball"

Independent test labs certify that I-MET²® exceeds ASTM F2413-11 Requirements for Impact, Compression, Metatarsal, and Electrical Hazard Standards.



I-MET²



E078

▶ 6" I-MET²

	UPPER:	Black Full Grain Oil-Tanned Leather
	CONSTRUCTION:	Goodyear Storm Welt
75	LINING:	Forest Green Dri-Lex®
MT	INSOLE:	Removable Polyurethane Footbed on Top of a Poron® 4000 Comfort Cushion
I-M²	MIDSOLE:	Rubber Green Stripe
EH	SHANK:	Engineered Composite
SR	OUTSOLE:	Work One® Dual Density Polyurethane Comfort Sole With 90° Heel
	SPECIAL FEATURES:	ASTM F2413-11 M I/75/C/75/M/75 Steel Toe, EH Rated. Tested For and Meets CAN/CSA-Z195 18,000 Volts Electric Shock Resistance Standard. Patented I-MET ² Technology.

MEN'S SIZES

D 4-12, 13, 14, 15
EEE 7-12, 13, 14

SOLE 21



MADE IN THE USA





I-MET²



E608

▶ 8" I-MET ²	
	UPPER: Black Walnut Full Grain Oil-Tanned Leather
	CONSTRUCTION: Goodyear Storm Welt
75	LINING: Forest Green Dri-Lex®
MT	INSOLE: Removable Polyurethane Footbed on Top of a Poron® 4000 Comfort Cushion
I-M ²	MIDSOLE: Rubber Green Stripe
EH	SHANK: Engineered Composite
SR	OUTSOLE: HEAT RESISTING Vibram® ALPHA+ Sole
	SPECIAL FEATURES: ASTM F2413-11 M I/75/C/75/M/75 Steel Toe, EH Rated. Tested For and Meets CAN/CSA-Z195 18,000 Volts Electric Shock Resistance Standard. Patented I-MET ² Technology. Reinforce Stitch "Ball to Ball" on Outsole.

MEN'S SIZES	
D	7-12, 13, 14
EE	8-12, 13, 14
EEE	8-12, 13, 14



E098

I-MET²



▶ 8" I-MET ²	
	UPPER: Brown Full Grain Tumbled Leather
	CONSTRUCTION: Goodyear Storm Welt
75	LINING: Forest Green Dri-Lex®
MT	INSOLE: Removable Polyurethane Footbed on Top of a Poron® 4000 Comfort Cushion
I-M ²	MIDSOLE: Rubber Green Stripe
EH	SHANK: Engineered Composite
SR	OUTSOLE: Work One® Dual Density Polyurethane Comfort Sole with 90° Heel
	SPECIAL FEATURES: ASTM F2413-11 M I/75/C/75/M/75 Steel Toe, EH Rated. Tested For and Meets CAN/CSA-Z195 18,000 Volts Electric Shock Resistance Standard. Patented I-MET ² Technology. Reinforce Stitch "Ball to Ball" on Outsole.

MEN'S SIZES	
D	8-12, 13
EEE	8-12, 13



I 707

I-MET²



▶ WELLINGTON I-MET ²	
	UPPER: Black Walnut Full Grain Oil-Tanned Leather
	CONSTRUCTION: Goodyear Storm Welt
75	LINING: Forest Green Dri-Lex®
MT	INSOLE: Removable Polyurethane Footbed on Top of a Poron® 4000 Comfort Cushion
I-M ²	MIDSOLE: Rubber
EH	SHANK: Engineered Composite
SR	OUTSOLE: HEAT RESISTING Vibram® ALPHA+ Sole
	SPECIAL FEATURES: ASTM F2413-11 M I/75/C/75/M/75 Steel Toe, EH Rated. Tested For and Meets CAN/CSA-Z195 18,000 Volts Electric Shock Resistance Standard. Patented I-MET ² Technology. Kevlar® Stitching on Upper. Kevlar® Goodyear Welt Stitching. Reinforce Stitch "Ball to Ball" on Outsole.

MEN'S SIZES	
D	8-12, 13, 14
EEE	8-12, 13, 14





E068

► 6" EXTERNAL METATARSAL GUARD

	UPPER:	Black Full Grain Oil-Tanned Leather
	CONSTRUCTION:	Goodyear Storm Welt
75	LINING:	Forest Green Dri-Lex®
MT	INSOLE:	Removable Polyurethane Footbed on Top of a Poron® 4000 Comfort Cushion
EH	MIDSOLE:	Rubber Green Stripe
SR	SHANK:	Engineered Composite
	OUTSOLE:	Work One® Dual Density Polyurethane Comfort Sole With 90° Heel
SPECIAL FEATURES: ASTM F2413-11 M I/75/C/75/M/75 Steel Toe, EH Rated. Tested For and Meets CAN/CSA-Z195 18,000 Volts Electric Shock Resistance Standard. Reinforce Stitch "Ball to Ball" on Outsole.		

MEN'S SIZES	
D	7-12, 13, 14, 15, 16, 17, 18
E	9-12, 13
EEE	8-12, 13, 14, 15, 16, 17, 18
SOLE 21	



E069

► 6" EXTERNAL METATARSAL GUARD

	UPPER:	Black Full Grain Oil-Tanned Leather
	CONSTRUCTION:	Goodyear Storm Welt
75	LINING:	Forest Green Dri-Lex®
MT	INSOLE:	Removable Polyurethane Footbed on Top of a Poron® 4000 Comfort Cushion
EH	MIDSOLE:	Rubber Green Stripe
SR	SHANK:	Engineered Composite
	OUTSOLE:	Work One® Dual Density Polyurethane Comfort Sole With 90° Heel
SPECIAL FEATURES: ASTM F2413-11 M I/75/C/75/M/75 Steel Toe, EH Rated. Tested For and Meets CAN/CSA-Z195 18,000 Volts Electric Shock Resistance Standard. Reinforce Stitch "Ball to Ball" on Outsole.		

MEN'S SIZES	
D	8-12, 13
E	8-12, 13
EEE	9-12, 13
SOLE 21	



E308

► 8" EXTERNAL METATARSAL GUARD

	UPPER:	Brown Full Grain Oil-Tanned Leather
	CONSTRUCTION:	Goodyear Storm Welt
75	LINING:	Forest Green Dri-Lex®
MT	INSOLE:	Removable Polyurethane Footbed on Top of a Poron® 4000 Comfort Cushion
EH	MIDSOLE:	Rubber Green Stripe
SR	SHANK:	Engineered Composite
	OUTSOLE:	Work One® Dual Density Polyurethane Comfort Sole With 90° Heel
SPECIAL FEATURES: ASTM F2413-11 M I/75/C/75/M/75 Steel Toe, EH Rated. Tested For and Meets CAN/CSA-Z195 18,000 Volts Electric Shock Resistance Standard. Reinforce Stitch "Ball to Ball" on Outsole.		

MEN'S SIZES	
D	8-12, 13
E	9-12, 13
EEE	8-12, 13
SOLE 21	





S060

6" SPORT BOOT SAFETY TOE

UPPER:	Black Walnut Full Grain Oil-Tanned Leather
CONSTRUCTION:	Goodyear Storm Welt
75 LINING:	Forest Green Dri-Lex®
SD INSOLE:	Removable Polyurethane "Ultimate® SD" Footbed
SR MIDSOLE:	Rubber Green Stripe
SHANK:	Engineered Composite
OUTSOLE:	Work One® Dual Density Polyurethane Comfort Sole with 90° Heel

SPECIAL FEATURES: ASTM F2413-11 M I/75/C/75 Steel Toe. Static Dissipative, Meets ASTM 2412-11 Test Requirements. Reinforce Stitch "Ball to Ball" on Outsole.

MEN'S SIZES

B 4-10
D 4-10



SEE CHART ON PAGE 23

SOLE 21



I 700

6" I-MET

UPPER:	Black Full Grain Oil-Tanned Leather
CONSTRUCTION:	Goodyear Storm Welt
75 LINING:	Forest Green Dri-Lex®
MT INSOLE:	Removable Polyurethane Footbed on Top of a Poron® 4000 Comfort Cushion
I-M MIDSOLE:	Rubber Green Stripe
SHANK:	Engineered Composite
EH OUTSOLE:	Work One® Dual Density Polyurethane Comfort Sole with 90° Heel

SPECIAL FEATURES: ASTM F2413-11 M I/75/C/75/M/75 Steel Toe, EH Rated. Tested For and Meets CAN/CSA-Z195 18,000 Volts Electric Shock Resistance Standard. Patented I-MET Technology. Reinforce Stitch "Ball to Ball" on Outsole.

MEN'S SIZES

D 4-10



SEE CHART ON PAGE 23

SOLE 21



I 702

6" I-MET

UPPER:	Black Walnut Full Grain Oil-Tanned Leather
CONSTRUCTION:	Goodyear Storm Welt
75 LINING:	Forest Green Dri-Lex®
MT INSOLE:	Removable Polyurethane Footbed on Top of a Poron® 4000 Comfort Cushion
I-M MIDSOLE:	Rubber
SHANK:	Engineered Composite
EH OUTSOLE:	HEAT RESISTING Vibram® ALPHA+ Sole

SPECIAL FEATURES: ASTM F2413-11 M I/75/C/75/M/75 Steel Toe, EH Rated. Tested For and Meets CAN/CSA-Z195 18,000 Volts Electric Shock Resistance Standard. Patented I-MET Technology. Reinforce Stitch "Ball to Ball" on Outsole.

MEN'S SIZES

D 4-10



SEE CHART ON PAGE 23

SOLE 5



8708

6" I-MET²

UPPER:	Black Full Grain Leather
CONSTRUCTION:	Direct Injection
75 LINING:	Forest Green Dri-Lex®
MT INSOLE:	Super Cushion Polyurethane Removable Footbed
I-M ² MIDSOLE:	Polyurethane
SHANK:	Engineered Composite
EH OUTSOLE:	SoftStreets™ Dual Density Polyurethane

SPECIAL FEATURES: ASTM F2413-11 M I/75/C/75/M/75 Steel Toe, EH Rated. Tested For and Meets CAN/CSA-Z195 18,000 Volts Electric Shock Resistance Standard. Patented I-MET² Technology.

WOMEN'S SIZES

M 5½-10
W 5½-10

SOLE 12



I-MET²

E078

6" I-MET²

UPPER:	Black Full Grain Oil-Tanned Leather
CONSTRUCTION:	Goodyear Storm Welt
75 LINING:	Forest Green Dri-Lex®
MT INSOLE:	Removable Polyurethane Footbed on Top of a Poron® 4000 Comfort Cushion
I-M ² MIDSOLE:	Rubber Green Stripe
SHANK:	Engineered Composite
EH OUTSOLE:	Work One® Dual Density Polyurethane Comfort Sole With 90° Heel

SPECIAL FEATURES: ASTM F2413-11 M I/75/C/75/M/75 Steel Toe, EH Rated. Tested For and Meets CAN/CSA-Z195 18,000 Volts Electric Shock Resistance Standard. Patented I-MET² Technology.

MEN'S SIZES

D 4-10



SEE CHART ON PAGE 23

SOLE 21



I-MET²



501



502



503




520



547



500



700



531



741



545

Thorogood

500	Slatwall Shelves
501	2' x 4' Thorogood - Union Banners
502	2' x 4' Banners
503	3' x 5' Floor Mats
520	8½" x 11" Blank Acrylic Slatwall Sign Holders
531	18" x 14" Slatwall Sign
545	Wire Boot Holder with Interchangeable Signs
547	Tower Display
550	Foot Sizers

Work One

545	Wire Boot Holder
700	Slatwall Shelves
741	Cling

FOOTBEDS

889-6017

"Ultimate® SD" Designed Specifically for Static Dissipative Footwear ONLY.

MEN'S	
XS	4-5½
S	6-7½
M	8-9½
L	10-11½
XL	12-13½
XXL	14-15



SEE CHART ON PAGE 23
DUAL GENDER SIZING

889-6009

"VGS MOTION SENSOR" as found in all Visible Gel System Footwear.

MEN'S	
XS	4-5½
S	6-7½
M	8-9½
L	10-11½
XL	12-13½
XXL	14-15



SEE CHART ON PAGE 23
DUAL GENDER SIZING

889-8000

"The Deuce" Two Density Polyurethane "SHOCK ZONE" Footbed.

MEN'S	
XS	4-5½
S	6-7½
M	8-9½
L	10-11½
XL	12-13½
XXL	14-15















SEE CHART ON PAGE 23
DUAL GENDER SIZING

889-6007

Men's Ultimate Shock Absorption™ FOOTBED

S	7-9
M	9½-11
L	11½-13
XL	14-15



	1	3	5	6	7	8	10	12	19	21	22	24
												
	B	A	A	B	B	A	A	A	A	A	A	A
	A	C	A	A	A	A	A	A	A	A	A	A
	C	A	A	C	C	A	A	C	C	C	A	B
	A	B	A	A	A	A	A	C	B	B	A	B
	B	A	B	A	A	B	B	A	A	A	A	A

Abrasion-resisting


Oil-resisting

Heat-resisting

Chip-resisting

Slip-resisting

KEY A=BEST B=BETTER C=GOOD

	25	26	27	28	29	30	31	32	33	34	35
											
	A	A	A	A	A	A	A	A	A	A	A
	A	A	A	A	A	A	A	A	A	A	A
	B	B	B	B	B	B	C	B	B	B	C
	A	A	B	B	B	B	B	B	B	B	B
	A	A	A	A	A	A	A	A	A	A	A



WEINBRENNER SHOE COMPANY
108 S. POLK STREET
MERRILL, WISCONSIN 54452
1-800-826-0002
WEINBRENNERUSA.COM

